



NEMA Premium

**NEMA**

<b>MOTOR MODEL:</b>	GR3-CI-TF-286T-6-BR-D-20
<b>FACTORY TYPE:</b>	TXC

Premium NEMA Cast Iron, TEFC

ELECTRICAL DATA		
	60 Hz	50 Hz
Horsepower	20.0	20.0
Speed, RPM	1175	965
Voltage	208-230/460	190/380
# Phase	3	
Full Load Amps	51.05/25.53	62.8/31.4
Power Factor	0.8	-
Nominal Efficiency	91.7	89.1
3/4 Load Efficiency	-	-
Service Factor	1.25	1.0
KVA Code	L	F
FL Amps. @ 208 V	56.4528	-
LRC @ 60Hz HV	236.819	-
Start Capacitor	-	
Start Capacitor V	-	
Run Capacitor	-	
Run Capacitor V	-	
Number of Leads	12	
Connection	DD/D	
Coil Resistance	-	
Date Code	-	
Load	Efficiency %	P.F.
50%	91.19	0.64
75%	92.24	0.76
100%	92.16	0.81
FULL LOAD TEMPERATURE RISE		
FL Temp Rise °C	60.0	-
3D Image Link		
<a href="#">GR3-CI-TF-286T-6-BR-D-20</a>		

GENERAL DATA				
Frame Size	286T			
Frame Enclosure	TEFC			
Mounting	Rigid			
Insulation Class	F			
Duty	Cont. / S1			
NEMA Design	A			
Frame Material	Cast Iron			
Ingress Protection	55			
Tropicalization	true			
Cable Entry	1-NPT 1-1/2"			
Feet Removable	true			
Double Drilled	true			
Paint Color	Graphite Gray			
Paint RAL	7024			
Weight lb	403.515			
MECHANICAL DATA				
DE Bearing	6311C3			
NDE Bearing	6311C3			
dB No-Load	-			
Rotor Wk <sup>2</sup> , Lb-Ft <sup>2</sup>	-			
Comp Ring (wavey washer)	DE			
TORQUE VALUES			Torque lb-ft	% FLT
Locked Rotor Torque	224.057	249.0		
Pull-Up Torque	120.577	134.0		
Breakdown Torque	296.043	329.0		
Full Load Torque	89.9826	100.0		
SITE CONDITIONS				
Ambient Temp °C	40			
Altitude Above Sea Level m	1000			

\*This report valid for above Date Code and newer models, please contact Techttop for more info.

Techtop Industries  
2815 Colonnades Court  
Peachtree Corners, GA 30071  
Tel: 678-436-5540  
E-Mail: info@techttopind.com




NEMA Premium

**NEMA**

<b>MOTOR MODEL:</b>	GR3-CI-TF-286T-6-BR-D-20
<b>FACTORY TYPE:</b>	TXC

Premium NEMA Cast Iron, TEFC

Torque Speed (T-n) Curve

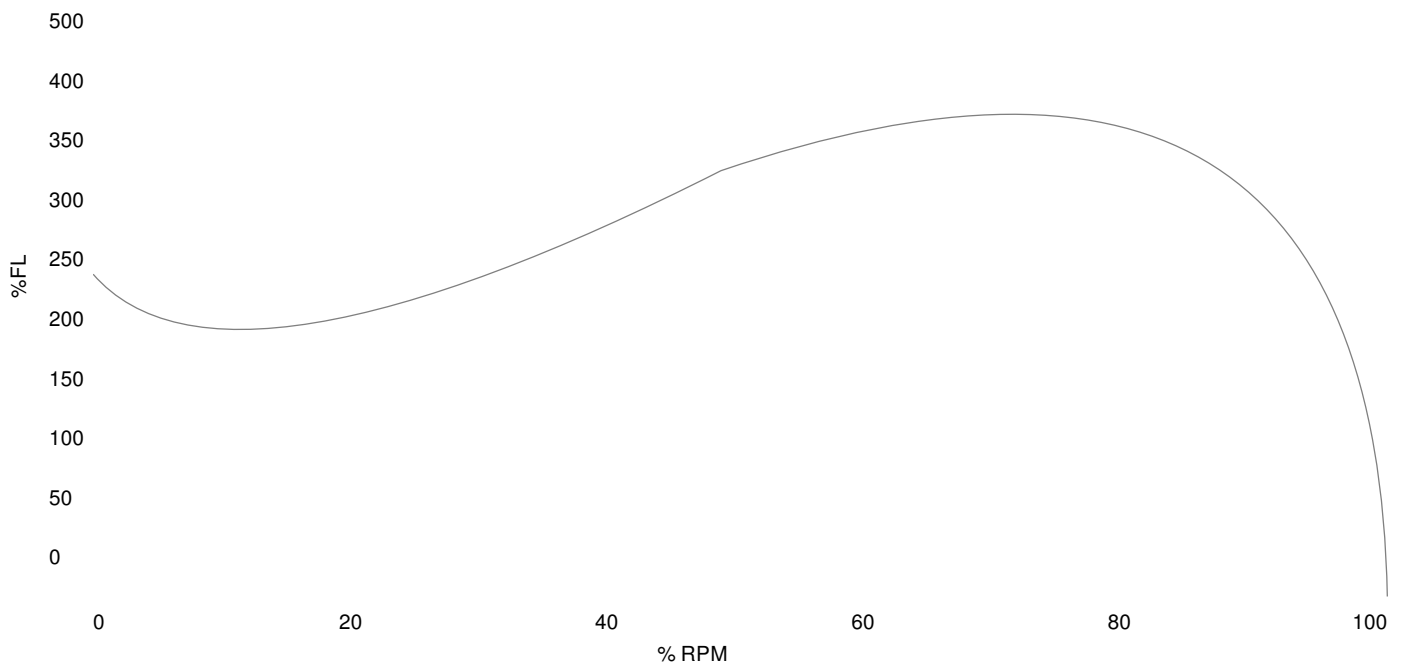

Performance Load Values, High Voltage, 60Hz

Torque Values	Torque lb-ft	% FLT	Performance Values	
Locked Rotor Torque	224.057	249.0	Start Configuration	-
Pull-Up Torque	120.577	134.0	Starting Current (A)	-
Breakdown Torque	296.043	329.0	No-Load Current (A)	-
Full Load	89.9826	100.0	No-Load Power Factor	-

% Load	Horsepower	Current, Amps	Input power, Kilowatts	Speed, RPM	Efficiency	PF
0	-	11.93	-	-	-	-
25	5.0	13.18	4.35	1195.8	86.25	0.41
50	10.0	16.17	8.23	1191.8	91.19	0.64
75	15.0	20.24	12.2	1187.5	92.24	0.76
100	20.0	25.14	16.28	1182.8	92.16	0.81
125	25.0	30.62	20.48	1177.8	91.56	0.84

Techtop Industries  
 2815 Colonnades Court  
 Peachtree Corners, GA 30071  
 Tel: 678-436-5540  
 E-Mail: info@techttopind.com