



NEMA Premium

NEMA

| | |
|----------------------|---------------------------|
| MOTOR MODEL: | BR3-CI-TF-444T-4-BR-E-125 |
| FACTORY TYPE: | TXC |

Premium NEMA Cast Iron, TEFC

| ELECTRICAL DATA | | |
|---|--------------|-------|
| | 60 Hz | 50 Hz |
| Horsepower | 125.0 | 125.0 |
| Speed, RPM | 1780 | 1480 |
| Voltage | 460 | 380 |
| # Phase | 3 | |
| Full Load Amps | 139.4117358 | 167 |
| Power Factor | 0.88 | - |
| Nominal Efficiency | 95.4 | 93.7 |
| 3/4 Load Efficiency | - | - |
| Service Factor | 1.15 | 1.0 |
| KVA Code | K | D |
| FL Amps. @ 208 V | - | - |
| Locked Rotor Current | 1465.36 | - |
| Start Capacitor | - | - |
| Start Capacitor V | - | - |
| Run Capacitor | - | - |
| Run Capacitor V | - | - |
| Number of Leads | 6 | |
| Connection | D | |
| Coil Resistance | - | - |
| Date Code | - | - |
| | | |
| Load | Efficiency % | P.F. |
| 50% | 94.33 | 0.73 |
| 75% | 95.38 | 0.83 |
| 100% | 95.65 | 0.87 |
| | | |
| FULL LOAD TEMPERATURE RISE | | |
| FL Temp Rise °C | 70.0 | - |
| | | |
| 3D Image Link | | |
| BR3-CI-TF-444T-4-BR-E-125 | | |

| GENERAL DATA | | | |
|--|---------------|--------------|-------|
| Frame Size | 444T | | |
| Frame Enclosure | TEFC | | |
| Mounting | Rigid | | |
| Insulation Class | F | | |
| Duty | Cont. / S1 | | |
| NEMA Design | A | | |
| Frame Material | Cast Iron | | |
| Ingress Protection | 56 | | |
| Tropicalization | true | | |
| Cable Entry | 1-NPT 3" | | |
| Feet Removable | - | | |
| Double Drilled | true | | |
| Paint Color | Graphite Gray | | |
| Paint RAL | 7024 | | |
| Weight lb | 1479.56 | | |
| | | | |
| MECHANICAL DATA | | | |
| DE Bearing | 6319C3 | | |
| NDE Bearing | 6319C3 | | |
| dB No-Load | - | | |
| Rotor Wk ² , Lb-Ft ² | - | | |
| Comp Ring (wavey washer) | DE | | |
| | | | |
| TORQUE VALUES | | Torque lb-ft | % FLT |
| Locked Rotor Torque | 1294.77 | 355.0 | |
| Pull-Up Torque | 692.977 | 190.0 | |
| Breakdown Torque | 1240.06 | 340.0 | |
| Full Load Torque | 364.724 | 100.0 | |
| | | | |
| SITE CONDITIONS | | | |
| Ambient Temp °C | 40 | | |
| Altitude Above Sea Level m | 1000 | | |



NEMA Premium


NEMA

| | |
|----------------------|---------------------------|
| MOTOR MODEL: | BR3-CI-TF-444T-4-BR-E-125 |
| FACTORY TYPE: | TXC |

Premium NEMA Cast Iron, TEFC

Non Sinusoidal (VFD) Output 125.0HP, 1780 RPM

Torque Speed (T-n) Curve

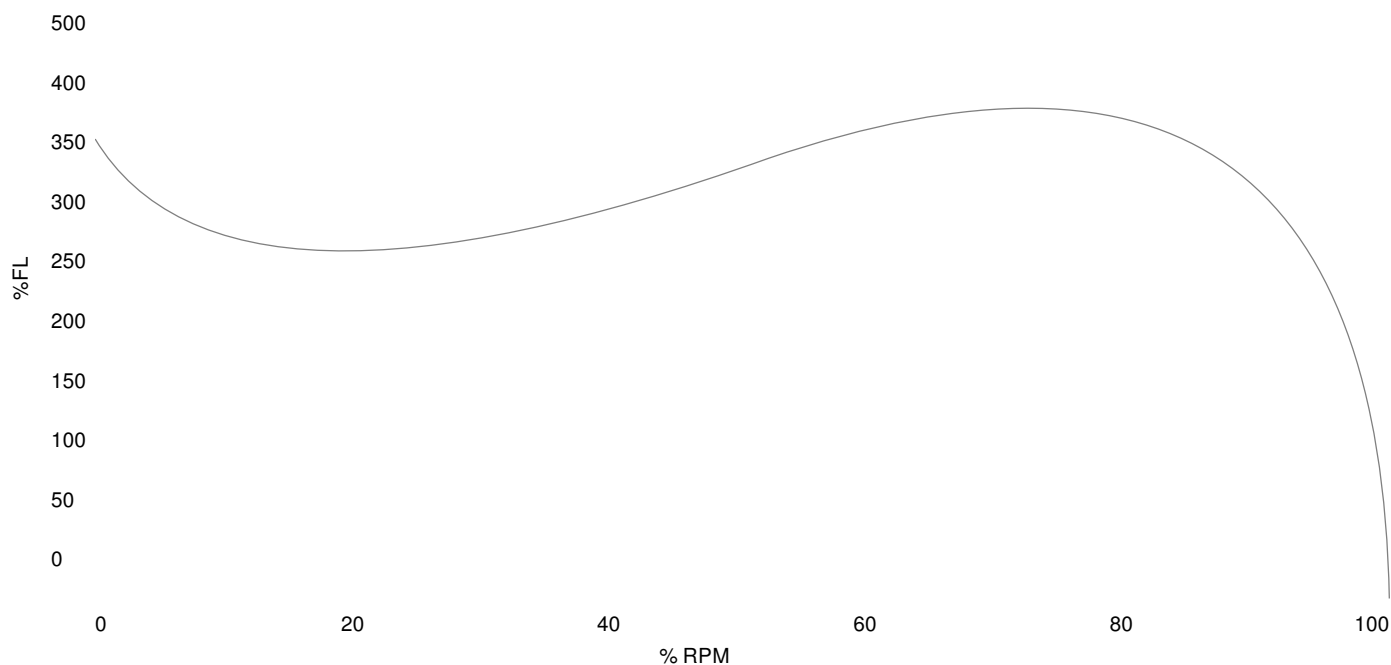

Performance Load Values, High Voltage, 60Hz

| Torque Values | Torque lb-ft | % FLT | Performance Values |
|---------------------|--------------|-------|----------------------|
| Locked Rotor Torque | 1294.77 | 355.0 | Start Configuration |
| Pull-Up Torque | 692.977 | 190.0 | Starting Current (A) |
| Breakdown Torque | 1240.06 | 340.0 | No-Load Current (A) |
| Full Load | 364.724 | 100.0 | No-Load Power Factor |

| % Load | Horsepower | Current, Amps | Input power, Kilowatts | Speed, RPM | Efficiency | PF |
|--------|------------|---------------|------------------------|------------|------------|------|
| 0 | - | 55.58 | - | - | - | - |
| 25 | 31.25 | 64.5 | 25.7 | 1797.7 | 90.47 | 0.5 |
| 50 | 62.5 | 85.06 | 49.3 | 1795.2 | 94.33 | 0.73 |
| 75 | 93.75 | 111.22 | 73.13 | 1792.7 | 95.38 | 0.83 |
| 100 | 125.0 | 140.92 | 97.23 | 1790.0 | 95.65 | 0.87 |
| 125 | 156.25 | 159.57 | 111.81 | 1788.3 | 95.65 | 0.88 |

Techtop Industries
 2815 Colonnades Court
 Peachtree Corners, GA 30071
 Tel: 678-436-5540
 E-Mail: info@techttopind.com