

<b>MOTOR MODEL:</b>	BR3-CI-TF-444TSC-2-BR-E-125
<b>FACTORY TYPE:</b>	TXC

## Premium NEMA Cast Iron, TEFC

<b>ELECTRICAL DATA</b>		
	60 Hz	50 Hz
Horsepower	125.0	125.0
Speed, RPM	3575	2960
Voltage	460	380
# Phase	3	
Full Load Amps	136.8876496	166
Power Factor	0.9	-
Nominal Efficiency	95.0	93.5
3/4 Load Efficiency	-	-
Service Factor	1.15	1.0
KVA Code	M	E
FL Amps. @ 208 V	-	-
Locked Rotor Current	1669.06	-
Start Capacitor	-	
Start Capacitor V	-	
Run Capacitor	-	
Run Capacitor V	-	
Number of Leads	6	
Connection	D	
Coil Resistance	-	
<b>Load</b>	<b>Efficiency %</b>	<b>P.F.</b>
50%	93.44	0.85
75%	94.56	0.9
100%	94.81	0.92
<b>FULL LOAD TEMPERATURE RISE</b>		
FL Temp Rise °C	81.0	-
<b>3D Image Link</b>		
Not available for this motor		

<b>GENERAL DATA</b>		
Frame Size	444TSC	
Frame Enclosure	TEFC	
Mounting	Rigid/C-Flange	
Insulation Class	F	
Duty	Cont. / S1	
NEMA Design	A	
Frame Material	Cast Iron	
Ingress Protection	56	
Tropicalization	true	
Cable Entry	1-NPT 3"	
Feet Removable	-	
Double Drilled	true	
Paint Color	Graphite Gray	
Paint RAL	7024	
Weight lb	1437.66	
<b>MECHANICAL DATA</b>		
DE Bearing	6316C3	
NDE Bearing	6316C3	
dB No-Load	-	
Rotor Wk <sup>2</sup> , Lb-Ft <sup>2</sup>	-	
Comp Ring (wavy washer)	-	
<b>TORQUE VALUES</b>	<b>Torque lb-ft</b>	<b>% FLT</b>
Locked Rotor Torque	693.434	330.0
Pull-Up Torque	310.995	148.0
Breakdown Torque	821.614	391.0
Full Load Torque	210.131	100.0
<b>SITE CONDITIONS</b>		
Ambient Temp °C	40	
Altitude Above Sea Level m	1000	



NEMA Premium


**NEMA**

<b>MOTOR MODEL:</b>	BR3-CI-TF-444TSC-2-BR-E-125
<b>FACTORY TYPE:</b>	TXC

Premium NEMA Cast Iron, TEFC

Non Sinusoidal (VFD) Output 125.0HP, 3575 RPM

Torque Speed (T-n) Curve

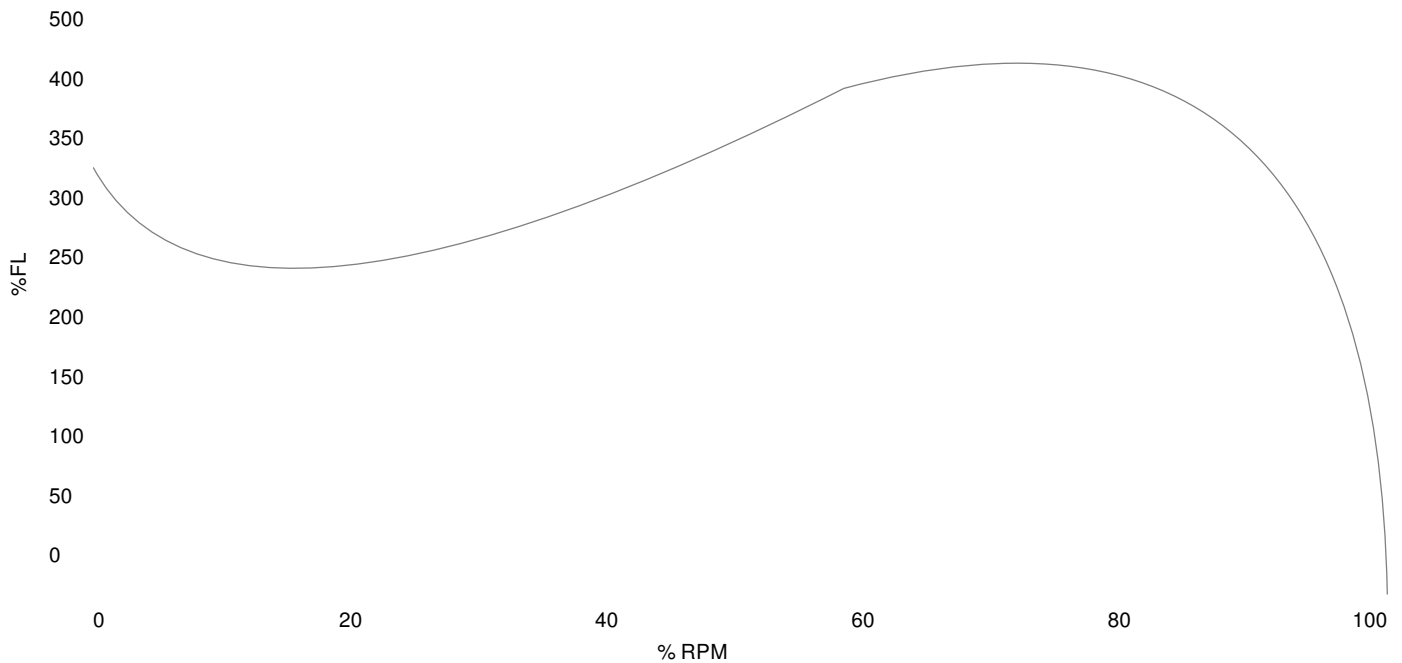

Performance Load Values, High Voltage, 60Hz

Torque Values	Torque lb-ft	% FLT	Performance Values
Locked Rotor Torque	693.434	330.0	Start Configuration
Pull-Up Torque	310.995	148.0	Starting Current (A)
Breakdown Torque	821.614	391.0	No-Load Current (A)
Full Load	210.131	100.0	No-Load Power Factor

% Load	Horsepower	Current, Amps	Input power, Kilowatts	Speed, RPM	Efficiency	PF
0	-	37.85	-	-	-	-
25	31.25	54.82	30.04	3594.5	89.21	0.89
50	62.5	84.97	57.36	3589.2	93.44	0.85
75	93.75	118.4	85.03	3583.6	94.56	0.9
100	125.0	154.45	113.07	3577.7	94.81	0.92
125	156.25	192.43	141.52	3571.6	94.69	0.92

Techtop Industries  
 2815 Colonnades Court  
 Peachtree Corners, GA 30071  
 Tel: 678-436-5540  
 E-Mail: info@techttopind.com