



NEMA Premium

**NEMA**

<b>MOTOR MODEL:</b>	BR3-CI-TF-449TC-6-RR-E-200
<b>FACTORY TYPE:</b>	TXC

Premium NEMA Cast Iron, TEFC

ELECTRICAL DATA		
	60 Hz	50 Hz
Horsepower	200.0	200.0
Speed, RPM	1180	980
Voltage	460	380
# Phase	3	
Full Load Amps	224.6806142	277
Power Factor	0.87	-
Nominal Efficiency	95.8	94.0
3/4 Load Efficiency	-	-
Service Factor	1.15	1.0
KVA Code	H	E
FL Amps. @ 208 V	-	-
Locked Rotor Current	2045.8	-
Start Capacitor	-	
Start Capacitor V	-	
Run Capacitor	-	
Run Capacitor V	-	
Number of Leads	6	
Connection	D	
Coil Resistance	-	
Date Code	-	
Load	Efficiency %	P.F.
50%	94.92	0.76
75%	95.26	0.84
100%	94.97	0.86
FULL LOAD TEMPERATURE RISE		
FL Temp Rise °C	113.0	-
3D Image Link		
<a href="#">BR3-CI-TF-449TC-6-RR-E-200</a>		

GENERAL DATA				
Frame Size	449TC			
Frame Enclosure	TEFC			
Mounting	Rigid/C-Flange			
Insulation Class	F			
Duty	Cont. / S1			
NEMA Design	A			
Frame Material	Cast Iron			
Ingress Protection	56			
Tropicalization	true			
Cable Entry	2-NPT 3"			
Feet Removable	-			
Double Drilled	true			
Paint Color	Graphite Gray			
Paint RAL	7024			
Weight lb	2244.69			
MECHANICAL DATA				
DE Bearing	NU319			
NDE Bearing	6319C3			
dB No-Load	-			
Rotor Wk <sup>2</sup> , Lb-Ft <sup>2</sup>	-			
Comp Ring (wavey washer)	-			
TORQUE VALUES			Torque lb-ft	% FLT
Locked Rotor Torque	2467.2	241.0		
Pull-Up Torque	-	-		
Breakdown Torque	3030.26	296.0		
Full Load Torque	1023.74	100.0		
SITE CONDITIONS				
Ambient Temp °C	40			
Altitude Above Sea Level m	1000			

\*This report valid for above Date Code and newer models, please contact Techttop for more info.

Techtop Industries  
2815 Colonnades Court  
Peachtree Corners, GA 30071  
Tel: 678-436-5540  
E-Mail: [info@techttopind.com](mailto:info@techttopind.com)



NEMA Premium


**NEMA**

<b>MOTOR MODEL:</b>	BR3-CI-TF-449TC-6-RR-E-200
<b>FACTORY TYPE:</b>	TXC

Premium NEMA Cast Iron, TEFC

Non Sinusoidal (VFD) Output 200.0HP, 1180 RPM

Torque Speed (T-n) Curve

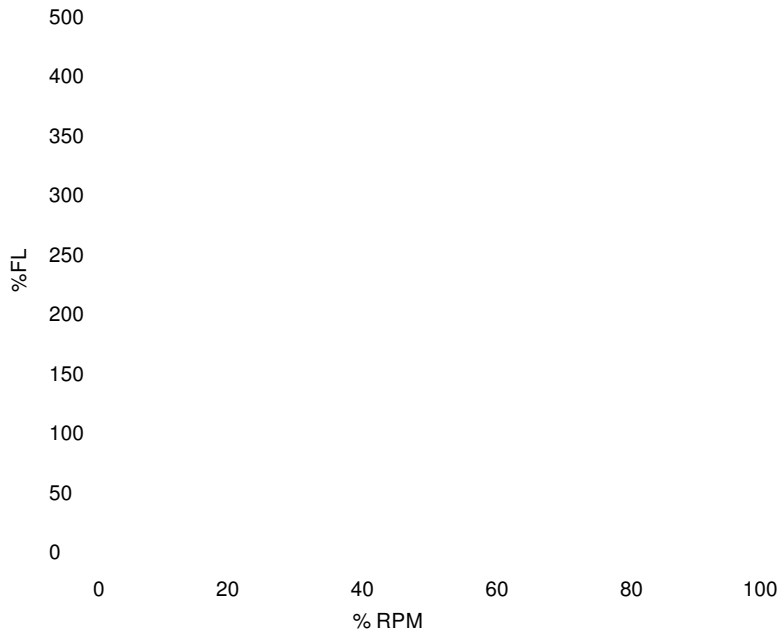

Performance Load Values, High Voltage, 60Hz

Torque Values	Torque lb-ft	% FLT	Performance Values
Locked Rotor Torque	2467.2	241.0	Start Configuration
Pull-Up Torque	-	-	Starting Current (A)
Breakdown Torque	3030.26	296.0	No-Load Current (A)
Full Load	1023.74	100.0	No-Load Power Factor

% Load	Horsepower	Current, Amps	Input power, Kilowatts	Speed, RPM	Efficiency	PF
0	-	86.89	-	-	-	-
25	50.0	105.68	46.68	1197.5	92.38	0.55
50	100.0	150.24	90.87	1195.1	94.92	0.76
75	150.0	203.98	135.81	1192.3	95.26	0.84
100	200.0	265.03	181.63	1189.4	94.97	0.86
125	250.0	304.38	209.57	1187.5	94.66	0.86

Techtop Industries  
 2815 Colonnades Court  
 Peachtree Corners, GA 30071  
 Tel: 678-436-5540  
 E-Mail: info@techttopind.com