



IE3

IEC

|                      |                           |
|----------------------|---------------------------|
| <b>MOTOR MODEL:</b>  | GR3-AL-TF-112MB35-6-B-D-3 |
| <b>FACTORY TYPE:</b> | TAX                       |

## IE3 IEC Cast Aluminum, TEFC

| ELECTRICAL DATA              |              |           |
|------------------------------|--------------|-----------|
|                              | 60 Hz        | 50 Hz     |
| Horsepower                   | 3.0          | 3.0       |
| Speed, RPM                   | 1175         | 970       |
| Voltage                      | 230/460      | 190/380   |
| # Phase                      | 3            |           |
| Full Load Amps               | 8.94/4.47    | 10.3/5.15 |
| Power Factor                 | 0.69         | -         |
| Nominal Efficiency           | 89.5         | -         |
| 3/4 Load Efficiency          | -            | -         |
| Service Factor               | 1.15         | 1.0       |
| KVA Code                     | L            | K         |
| FL Amps. @ 208 V             | 9.16         | -         |
| LRC @ 60Hz HV                | -            | -         |
| Start Capacitor              | -            |           |
| Start Capacitor V            | -            |           |
| Run Capacitor                | -            |           |
| Run Capacitor V              | -            |           |
| Number of Leads              | 9            |           |
| Connection                   | YY/Y         |           |
| Coil Resistance              | -            |           |
| Date Code                    | -            |           |
|                              |              |           |
| Load                         | Efficiency % | P.F.      |
| 50%                          | -            | -         |
| 75%                          | -            | -         |
| 100%                         | -            | -         |
|                              |              |           |
| FULL LOAD TEMPERATURE RISE   |              |           |
| FL Temp Rise °C              | -            | -         |
|                              |              |           |
| 3D Image Link                |              |           |
| Not available for this motor |              |           |

| GENERAL DATA                               |               |              |       |
|--|---------------|--------------|-------|
| Frame Size                                 | 112MB35       |              |       |
| Frame Enclosure                            | TEFC          |              |       |
| Mounting                                   | B35           |              |       |
| Insulation Class                           | F             |              |       |
| Duty                                       | Cont. / S1    |              |       |
| NEMA Design                                | -             |              |       |
| Frame Material                             | Cast Aluminum |              |       |
| Ingress Protection                         | 55            |              |       |
| Tropicalization                            | true          |              |       |
| Cable Entry                                | 2-M25X1.5     |              |       |
| Feet Removable                             | true          |              |       |
| Double Drilled                             | -             |              |       |
| Paint Color                                | Graphite Gray |              |       |
| Paint RAL                                  | 7024          |              |       |
| Weight lb                                  | 84.0          |              |       |
|  |               |              |       |
| MECHANICAL DATA                            |               |              |       |
| DE Bearing                                 | 6306ZZ        |              |       |
| NDE Bearing                                | 6206ZZ        |              |       |
| dB No-Load                                 | -             |              |       |
| Rotor Wk <sup>2</sup> , Lb-Ft <sup>2</sup> | -             |              |       |
| Comp Ring (wavy washer)                    | -             |              |       |
|  |               |              |       |
| TORQUE VALUES                              |               | Torque lb-ft | % FLT |
| Locked Rotor Torque                        |               | -            | -     |
| Pull-Up Torque                             |               | -            | -     |
| Breakdown Torque                           |               | -            | -     |
| Full Load Torque                           |               | -            | -     |
|  |               |              |       |
| SITE CONDITIONS                            |               |              |       |
| Ambient Temp °C                            |               | 40           |       |
| Altitude Above Sea Level m                 |               | 1000         |       |

\*This report valid for above Date Code and newer models, please contact Techtop for more info.




IE3

IEC

|                      |                           |
|----------------------|---------------------------|
| <b>MOTOR MODEL:</b>  | GR3-AL-TF-112MB35-6-B-D-3 |
| <b>FACTORY TYPE:</b> | TAX                       |

IE3 IEC Cast Aluminum, TEFC

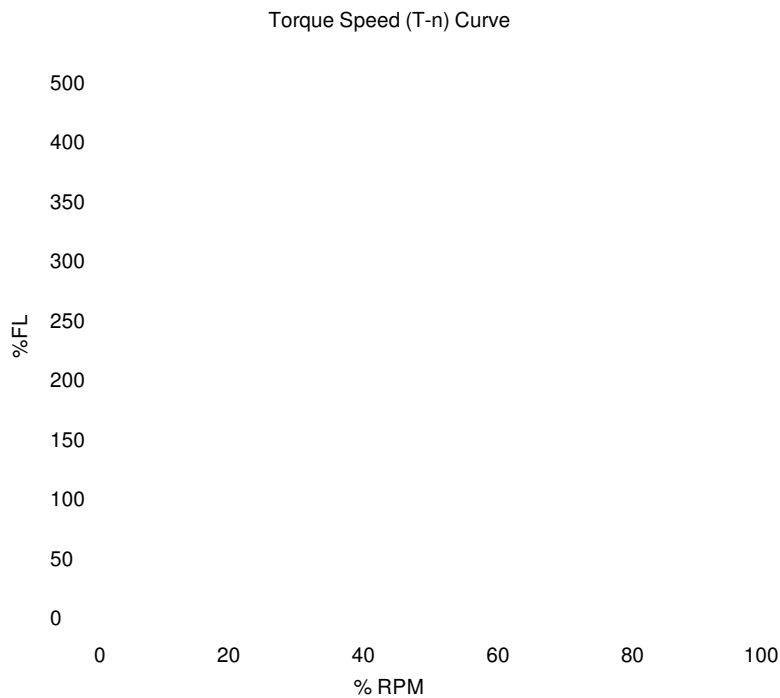

Performance Load Values, High Voltage, 60Hz

| Torque Values       | Torque lb-ft | % FLT | Performance Values   |
|---------------------|--------------|-------|----------------------|
| Locked Rotor Torque | -            | -     | Start Configuration  |
| Pull-Up Torque      | -            | -     | Starting Current (A) |
| Breakdown Torque    | -            | -     | No-Load Current (A)  |
| Full Load           | -            | -     | No-Load Power Factor |

| % Load | Horsepower | Current, Amps | Input power, Kilowatts | Speed, RPM | Efficiency | PF |
|--------|------------|---------------|------------------------|------------|------------|----|
| 0      | -          | -             | -                      | -          | -          | -  |
| 25     | -          | -             | -                      | -          | -          | -  |
| 50     | -          | -             | -                      | -          | -          | -  |
| 75     | -          | -             | -                      | -          | -          | -  |
| 100    | -          | -             | -                      | -          | -          | -  |
| 125    | -          | -             | -                      | -          | -          | -  |