



NEMA Premium

**NEMA**

<b>MOTOR MODEL:</b>	GR3-CI-TF-143T-2-B-F-1.5
<b>FACTORY TYPE:</b>	TXC

Premium NEMA Cast Iron, TEFC

ELECTRICAL DATA		
	60 Hz	50 Hz
Horsepower	1.5	1.5
Speed, RPM	3450	-
Voltage	575	-
# Phase	3	
Full Load Amps	1.611551676	-
Power Factor	0.83	-
Nominal Efficiency	84.0	-
3/4 Load Efficiency	-	-
Service Factor	1.25	1.0
KVA Code	K	-
FL Amps. @ 208 V	-	-
Locked Rotor Current	18.2307	-
Start Capacitor	-	
Start Capacitor V	-	
Run Capacitor	-	
Run Capacitor V	-	
Number of Leads	3	
Connection	Y	
Coil Resistance	-	
Load	Efficiency %	P.F.
50%	83.17	0.58
75%	85.78	0.72
100%	86.23	0.8
FULL LOAD TEMPERATURE RISE		
FL Temp Rise °C	-	-
3D Image Link		
<a href="#">GR3-CI-TF-143T-2-B-F-1.5</a>		

GENERAL DATA			
Frame Size	143T		
Frame Enclosure	TEFC		
Mounting	Rigid		
Insulation Class	F		
Duty	Cont. / S1		
NEMA Design	A		
Frame Material	Cast Iron		
Ingress Protection	55		
Tropicalization	true		
Cable Entry	1-NPT 3/4"		
Feet Removable	true		
Double Drilled	-		
Paint Color	Graphite Gray		
Paint RAL	7024		
Weight lb	41.895		
MECHANICAL DATA			
DE Bearing	6205ZZ		
NDE Bearing	6205ZZ		
dB No-Load	-		
Rotor Wk <sup>2</sup> , Lb-Ft <sup>2</sup>	-		
Comp Ring (wavey washer)	NDE		
TORQUE VALUES		Torque lb-ft	% FLT
Locked Rotor Torque	7.18504	328.0	
Pull-Up Torque	4.99448	228.0	
Breakdown Torque	8.34603	381.0	
Full Load Torque	2.19056	100.0	
SITE CONDITIONS			
Ambient Temp °C	40		
Altitude Above Sea Level m	1000		



NEMA Premium


**NEMA**

<b>MOTOR MODEL:</b>	GR3-CI-TF-143T-2-B-F-1.5
<b>FACTORY TYPE:</b>	TXC

Premium NEMA Cast Iron, TEFC

Non Sinusoidal (VFD) Output 1.5HP, 3450 RPM

Torque Speed (T-n) Curve

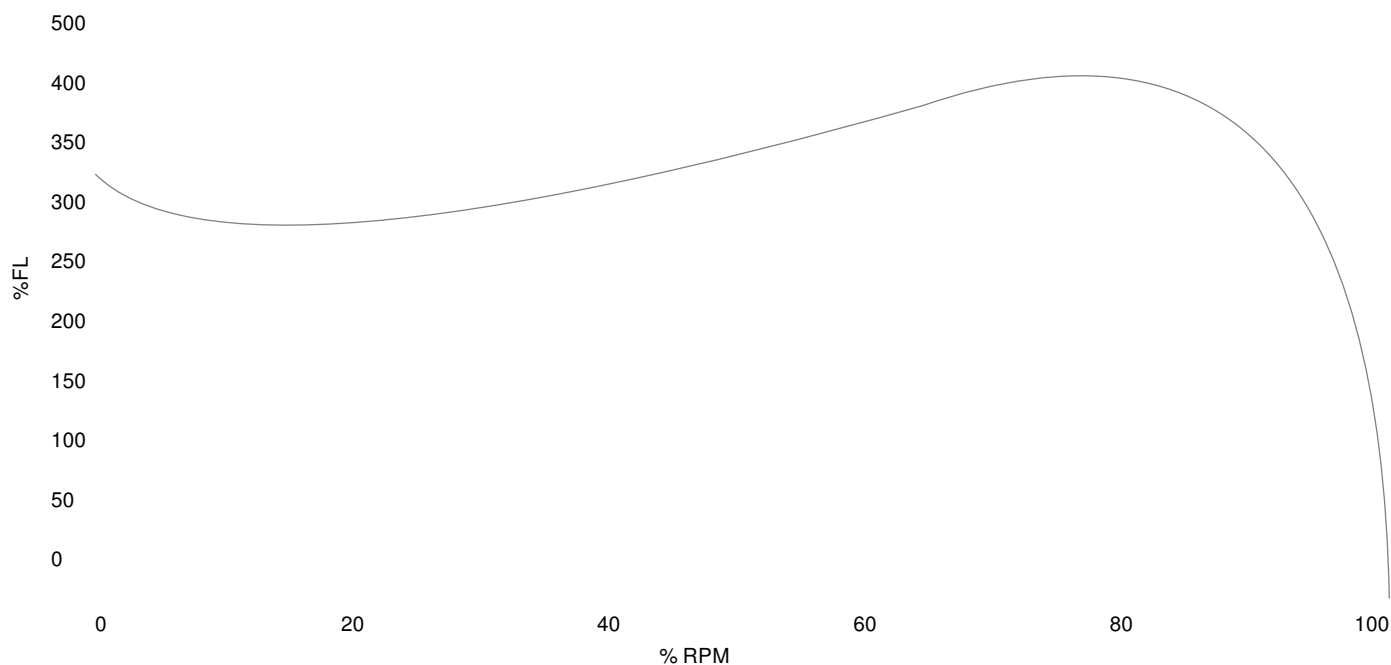

Performance Load Values, High Voltage, 60Hz

Torque Values	Torque lb-ft	% FLT	Performance Values	
Locked Rotor Torque	7.18504	328.0	Start Configuration	-
Pull-Up Torque	4.99448	228.0	Starting Current (A)	-
Breakdown Torque	8.34603	381.0	No-Load Current (A)	-
Full Load	2.19056	100.0	No-Load Power Factor	-

% Load	Horsepower	Current, Amps	Input power, Kilowatts	Speed, RPM	Efficiency	PF
0	-	1.22	-	-	-	-
25	0.375	1.27	372.11	3576.3	73.9	0.37
50	0.75	1.43	661.32	3556.2	83.17	0.58
75	1.125	1.69	961.82	3533.7	85.78	0.72
100	1.5	2.01	1275.7	3508.7	86.23	0.8
125	1.875	2.39	1605.2	3481.3	85.66	0.84

Techtop Industries  
 2815 Colonnades Court  
 Peachtree Corners, GA 30071  
 Tel: 678-436-5540  
 E-Mail: info@techttopind.com