



IE3

IEC

<b>MOTOR MODEL:</b>	GR3-CI-TF-160MB34-4-BR-D-15
<b>FACTORY TYPE:</b>	TCX

## IE3 IEC Cast Iron, TEFC

ELECTRICAL DATA		
	60 Hz	50 Hz
Horsepower	15.0	15.0
Speed, RPM	1760	1450
Voltage	230/460	190/380
# Phase	3	
Full Load Amps	37.2/18.6	45.2/22.6
Power Factor	0.81	-
Nominal Efficiency	92.4	-
3/4 Load Efficiency	-	-
Service Factor	1.15	1.0
KVA Code	J	F
FL Amps. @ 208 V	41.13	-
LRC @ 60Hz HV	169.824	-
Start Capacitor	-	
Start Capacitor V	-	
Run Capacitor	-	
Run Capacitor V	-	
Number of Leads	12	
Connection	DD/D	
Coil Resistance	-	
Date Code	-	
Load	Efficiency %	P.F.
50%	91.29	0.67
75%	92.52	0.78
100%	92.63	0.84
FULL LOAD TEMPERATURE RISE		
FL Temp Rise °C	45.0	60.0
3D Image Link		
<a href="#">GR3-CI-TF-160MB34-4-BR-D-15</a>		

GENERAL DATA		
Frame Size	160MB34	
Frame Enclosure	TEFC	
Mounting	B34	
Insulation Class	F	
Duty	Cont. / S1	
NEMA Design	A	
Frame Material	Cast Iron	
Ingress Protection	55	
Tropicalization	true	
Cable Entry	2-M32X1.5	
Feet Removable	true	
Double Drilled	-	
Paint Color	Graphite Gray	
Paint RAL	7024	
Weight lb	280.0	
MECHANICAL DATA		
DE Bearing	6309C3	
NDE Bearing	6309C3	
dB No-Load	-	
Rotor Wk <sup>2</sup> , Lb-Ft <sup>2</sup>	-	
Comp Ring (wavy washer)	-	
TORQUE VALUES		
	Torque lb-ft	% FLT
Locked Rotor Torque	130.197	290.0
Pull-Up Torque	109.994	245.0
Breakdown Torque	173.745	387.0
Full Load Torque	44.8954	100.0
SITE CONDITIONS		
Ambient Temp °C	40	
Altitude Above Sea Level m	1000	

\*This report valid for above Date Code and newer models, please contact Techttop for more info.

Techttop Industries  
 2815 Colonnades Court  
 Peachtree Corners, GA 30071  
 Tel: 678-436-5540  
 E-Mail: [info@techttopind.com](mailto:info@techttopind.com)




IE3

IEC

<b>MOTOR MODEL:</b>	GR3-CI-TF-160MB34-4-BR-D-15
<b>FACTORY TYPE:</b>	TCX

IE3 IEC Cast Iron, TEFC

Torque Speed (T-n) Curve

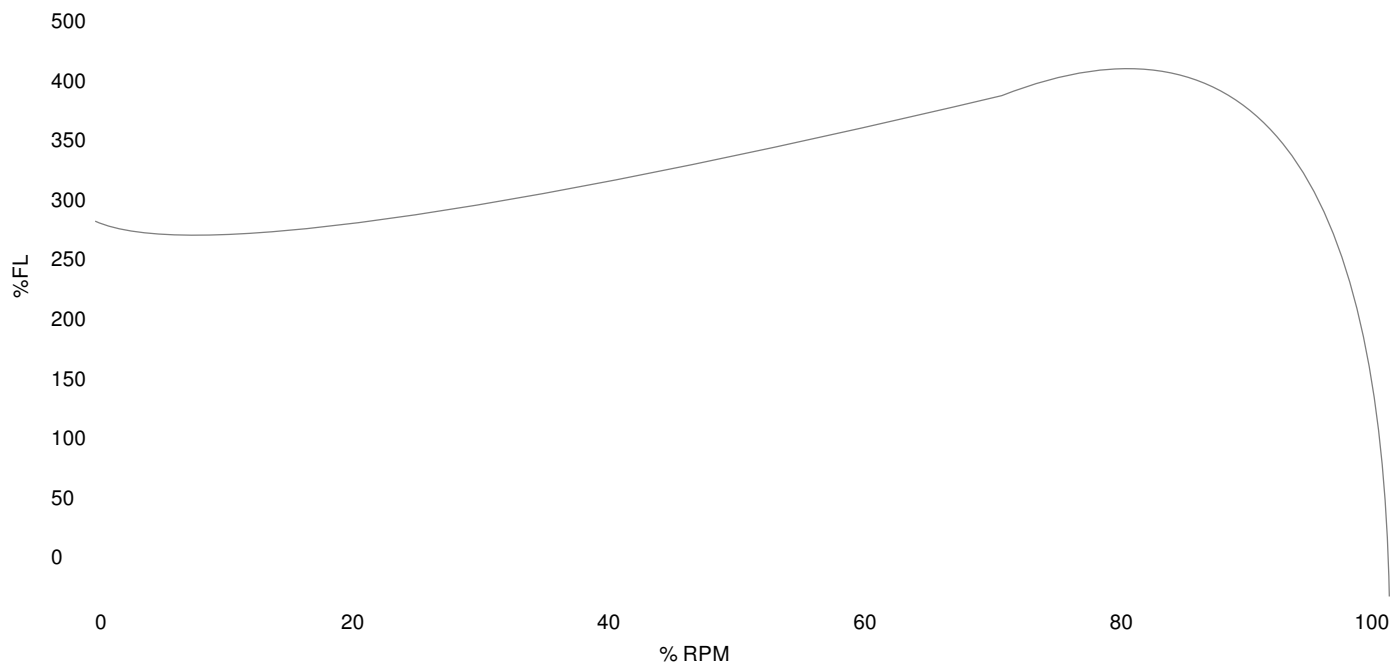

Performance Load Values, High Voltage, 60Hz

Torque Values	Torque lb-ft	% FLT	Performance Values
Locked Rotor Torque	130.197	290.0	Start Configuration
Pull-Up Torque	109.994	245.0	Starting Current (A)
Breakdown Torque	173.745	387.0	No-Load Current (A)
Full Load	44.8954	100.0	No-Load Power Factor

% Load	Horsepower	Current, Amps	Input power, Kilowatts	Speed, RPM	Efficiency	PF
0	-	8.37	-	-	-	-
25	3.75	9.23	3.28	1794.2	86.19	0.45
50	7.5	11.62	6.19	1788.5	91.29	0.67
75	11.25	14.7	9.16	1782.5	92.52	0.78
100	15.0	18.3	12.2	1776.1	92.63	0.84
125	18.75	22.25	15.31	1769.4	92.25	0.86

Techtop Industries  
 2815 Colonnades Court  
 Peachtree Corners, GA 30071  
 Tel: 678-436-5540  
 E-Mail: info@techttopind.com