



IE3

IEC

<b>MOTOR MODEL:</b>	GR3-CI-TF-225SB34-4-BR-D-50
<b>FACTORY TYPE:</b>	TCX

## IE3 IEC Cast Iron, TEFC

ELECTRICAL DATA		
	60 Hz	50 Hz
Horsepower	50.0	50.0
Speed, RPM	1770	1460
Voltage	230/460	190/380
# Phase	3	
Full Load Amps	118.4/59.2	136.0/68.0
Power Factor	0.87	-
Nominal Efficiency	94.5	-
3/4 Load Efficiency	-	-
Service Factor	1.15	1.0
KVA Code	J	E
FL Amps. @ 208 V	130.9	-
LRC @ 60Hz HV	613.812	-
Start Capacitor	-	
Start Capacitor V	-	
Run Capacitor	-	
Run Capacitor V	-	
Number of Leads	12	
Connection	DD/D	
Coil Resistance	-	
Date Code	-	
Load	Efficiency %	P.F.
50%	93.78	0.71
75%	94.29	0.81
100%	94.03	0.85
FULL LOAD TEMPERATURE RISE		
FL Temp Rise °C	68.0	90.0
3D Image Link		
Not available for this motor		

GENERAL DATA			
Frame Size	225SB34		
Frame Enclosure	TEFC		
Mounting	B34		
Insulation Class	F		
Duty	Cont. / S1		
NEMA Design	A		
Frame Material	Cast Iron		
Ingress Protection	55		
Tropicalization	true		
Cable Entry	2-M50X1.5		
Feet Removable	true		
Double Drilled	-		
Paint Color	Graphite Gray		
Paint RAL	7024		
Weight lb	606.0		
MECHANICAL DATA			
DE Bearing	6313C3		
NDE Bearing	6313C3		
dB No-Load	-		
Rotor Wk <sup>2</sup> , Lb-Ft <sup>2</sup>	-		
Comp Ring (wavey washer)	-		
TORQUE VALUES		Torque lb-ft	% FLT
Locked Rotor Torque	506.56	299.0	
Pull-Up Torque	333.754	197.0	
Breakdown Torque	520.113	307.0	
Full Load Torque	169.418	100.0	
SITE CONDITIONS			
Ambient Temp °C	40		
Altitude Above Sea Level m	1000		

\*This report valid for above Date Code and newer models, please contact Techttop for more info.

Techttop Industries  
 2815 Colonnades Court  
 Peachtree Corners, GA 30071  
 Tel: 678-436-5540  
 E-Mail: info@techttopind.com




IE3

IEC

<b>MOTOR MODEL:</b>	GR3-CI-TF-225SB34-4-BR-D-50
<b>FACTORY TYPE:</b>	TCX

## IE3 IEC Cast Iron, TEFC

Torque Speed (T-n) Curve

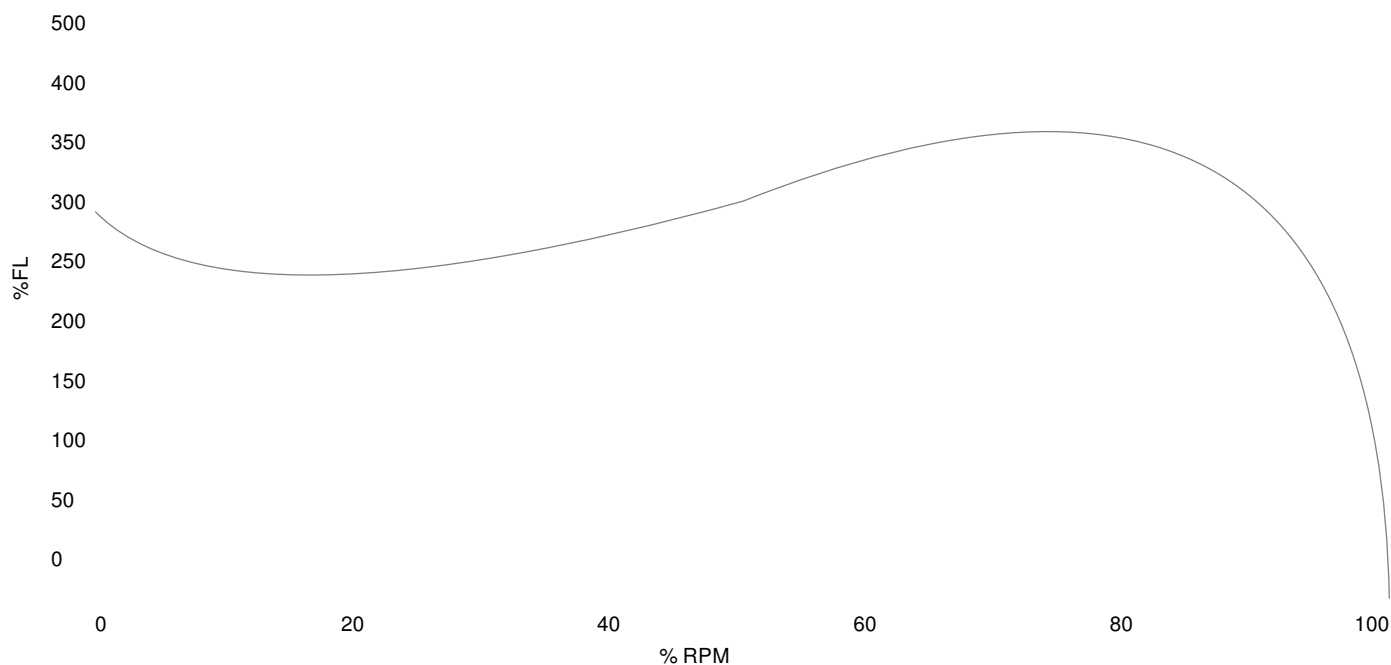

Performance Load Values, High Voltage, 60Hz

Torque Values	Torque lb-ft	% FLT	Performance Values	
Locked Rotor Torque	506.56	299.0	Start Configuration	-
Pull-Up Torque	333.754	197.0	Starting Current (A)	-
Breakdown Torque	520.113	307.0	No-Load Current (A)	-
Full Load	169.418	100.0	No-Load Power Factor	-

% Load	Horsepower	Current, Amps	Input power, Kilowatts	Speed, RPM	Efficiency	PF
0	-	26.53	-	-	-	-
25	12.5	30.25	11.84	1795.2	90.58	0.49
50	25.0	40.19	22.87	1790.5	93.78	0.71
75	37.5	52.63	34.12	1785.5	94.29	0.81
100	50.0	67.01	45.63	1780.2	94.03	0.85
125	62.5	82.79	57.41	1774.4	93.41	0.87

Techtop Industries  
 2815 Colonnades Court  
 Peachtree Corners, GA 30071  
 Tel: 678-436-5540  
 E-Mail: info@techttopind.com