





## Pump Motors


# NEMA

<b>MOTOR MODEL:</b>	GR3-CI-TF-254JP-2-BR-D-15
<b>FACTORY TYPE:</b>	TXC

### Premium NEMA Cast Iron, TEFC

Non Sinusoidal (VFD) Output 15.0HP, 3540 RPM

Torque Speed (T-n) Curve

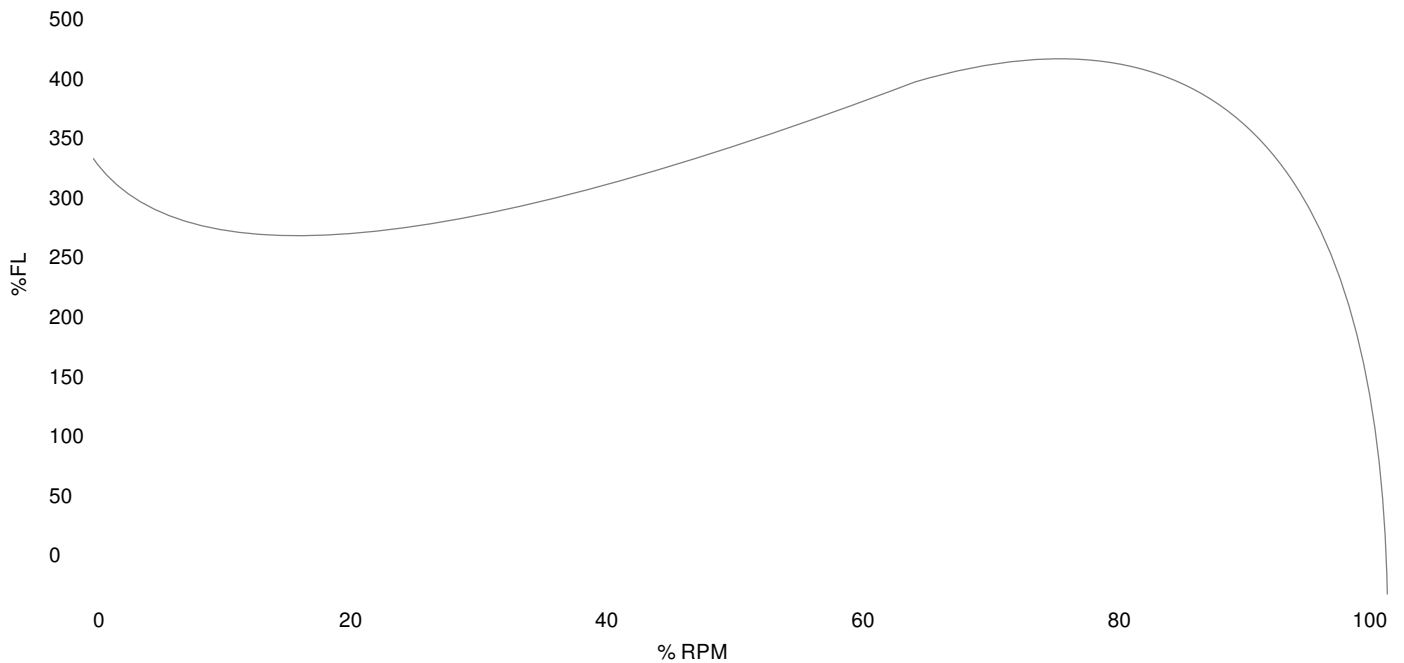

Performance Load Values, High Voltage, 60Hz

Torque Values	Torque lb-ft	% FLT	Performance Values
Locked Rotor Torque	75.0398	337.0	Start Configuration
Pull-Up Torque	42.9753	193.0	Starting Current (A)
Breakdown Torque	88.1773	396.0	No-Load Current (A)
Full Load	22.267	100.0	No-Load Power Factor

% Load	Horsepower	Current, Amps	Input power, Kilowatts	Speed, RPM	Efficiency	PF
0	-	8.01	-	-	-	-
25	3.75	9.11	3.58	3592.6	78.93	0.49
50	7.5	11.59	6.49	3585.6	87.1	0.71
75	11.25	14.7	9.45	3578.2	89.66	0.81
100	15.0	18.29	12.48	3570.4	90.53	0.86
125	18.75	22.21	15.58	3562.3	90.67	0.88

Techtop Industries  
 2815 Colonnades Court  
 Peachtree Corners, GA 30071  
 Tel: 678-436-5540  
 E-Mail: info@techttopind.com