



NEMA Premium

NEMA

MOTOR MODEL:	GR3-CI-TF-254T-6-BR-F-7.5
FACTORY TYPE:	TXC

Premium NEMA Cast Iron, TEFC

ELECTRICAL DATA		
	60 Hz	50 Hz
Horsepower	7.5	7.5
Speed, RPM	1170	-
Voltage	575	-
# Phase	3	
Full Load Amps	8.123003385	-
Power Factor	0.74	-
Nominal Efficiency	91.0	-
3/4 Load Efficiency	-	-
Service Factor	1.25	1.0
KVA Code	J	-
FL Amps. @ 208 V	-	-
Locked Rotor Current	-	-
Start Capacitor	-	
Start Capacitor V	-	
Run Capacitor	-	
Run Capacitor V	-	
Number of Leads	6	
Connection	D	
Coil Resistance	-	
Date Code	-	
Load	Efficiency %	P.F.
50%	90.32	0.56
75%	91.43	0.68
100%	91.33	0.75
FULL LOAD TEMPERATURE RISE		
FL Temp Rise °C	38.0	-
3D Image Link		
GR3-CI-TF-254T-6-BR-F-7.5		

GENERAL DATA		
Frame Size	254T	
Frame Enclosure	TEFC	
Mounting	Rigid	
Insulation Class	F	
Duty	Cont. / S1	
NEMA Design	A	
Frame Material	Cast Iron	
Ingress Protection	55	
Tropicalization	true	
Cable Entry	1-NPT 1-1/4"	
Feet Removable	true	
Double Drilled	-	
Paint Color	Graphite Gray	
Paint RAL	7024	
Weight lb	246.96	
MECHANICAL DATA		
DE Bearing	6309C3	
NDE Bearing	6309C3	
dB No-Load	-	
Rotor Wk ² , Lb-Ft ²	-	
Comp Ring (wavey washer)	DE	
TORQUE VALUES		
	Torque lb-ft	% FLT
Locked Rotor Torque	83.9161	246.0
Pull-Up Torque	44.687	131.0
Breakdown Torque	103.36	303.0
Full Load Torque	34.1123	100.0
SITE CONDITIONS		
Ambient Temp °C	40	
Altitude Above Sea Level m	1000	

*This report valid for above Date Code and newer models, please contact Techtop for more info.

Techtop Industries
 2815 Colonnades Court
 Peachtree Corners, GA 30071
 Tel: 678-436-5540
 E-Mail: info@techttopind.com



NEMA Premium


NEMA

MOTOR MODEL:	GR3-CI-TF-254T-6-BR-F-7.5
FACTORY TYPE:	TXC

Premium NEMA Cast Iron, TEFC

Non Sinusoidal (VFD) Output 7.5HP, 1170 RPM

Torque Speed (T-n) Curve

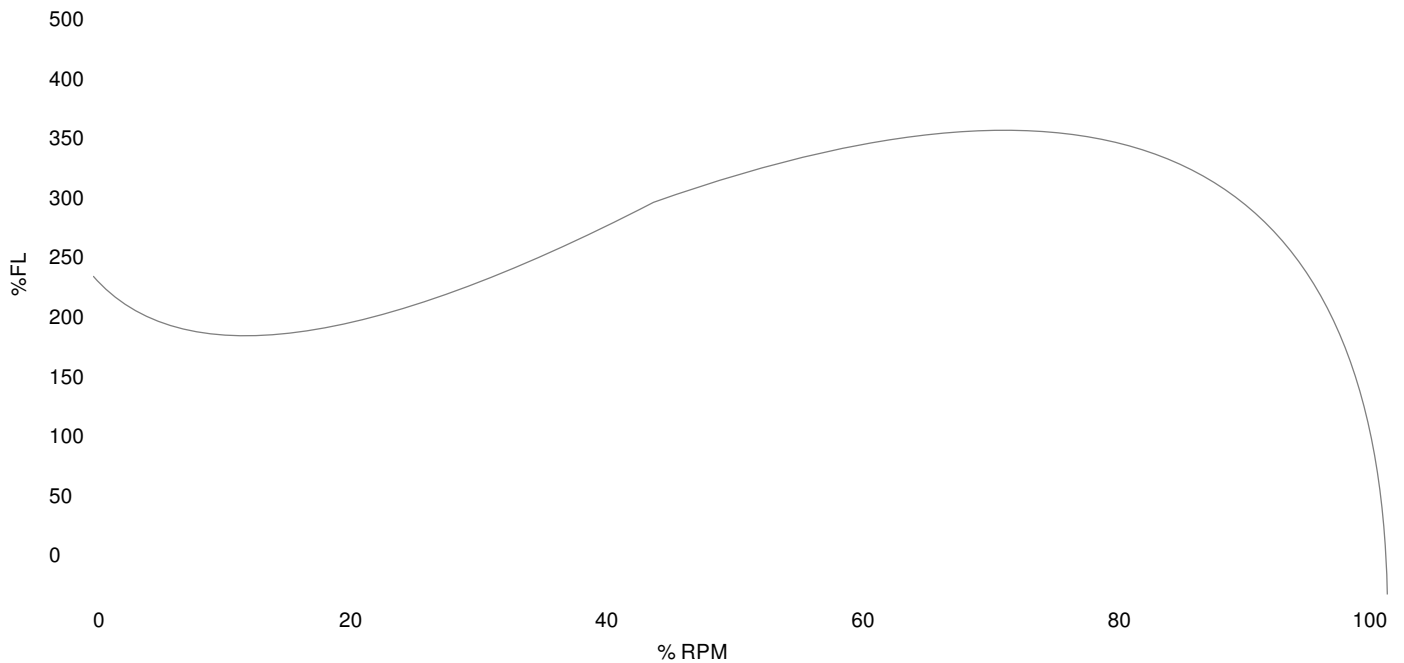

Performance Load Values, High Voltage, 60Hz

Torque Values	Torque lb-ft	% FLT	Performance Values
Locked Rotor Torque	83.9161	246.0	Start Configuration
Pull-Up Torque	44.687	131.0	Starting Current (A)
Breakdown Torque	103.36	303.0	No-Load Current (A)
Full Load	34.1123	100.0	No-Load Power Factor

% Load	Horsepower	Current, Amps	Input power, Kilowatts	Speed, RPM	Efficiency	PF
0	-	5.59	-	-	-	-
25	1.875	5.8	1.64	1194.4	85.17	0.36
50	3.75	6.98	3.1	1189.7	90.32	0.56
75	5.625	8.49	4.59	1184.4	91.43	0.68
100	7.5	10.31	6.13	1178.4	91.33	0.75
125	9.375	12.41	7.72	1171.8	90.64	0.78

Techtop Industries
 2815 Colonnades Court
 Peachtree Corners, GA 30071
 Tel: 678-436-5540
 E-Mail: info@techttopind.com