



NEMA Premium

# NEMA

<b>MOTOR MODEL:</b>	GR3-CI-TF-254TC-2-BR-D-15
<b>FACTORY TYPE:</b>	TXC

## Premium NEMA Cast Iron, TEFC

ELECTRICAL DATA		
	60 Hz	50 Hz
Horsepower	15.0	15.0
Speed, RPM	3540	2920
Voltage	230/460	190/380
# Phase	3	
Full Load Amps	35.08/17.54	45.2/22.6
Power Factor	0.88	-
Nominal Efficiency	91.0	88.0
3/4 Load Efficiency	-	-
Service Factor	1.25	1.0
KVA Code	L	F
FL Amps. @ 208 V	38.7866	-
LRC @ 60Hz HV	208.506	-
Start Capacitor	-	
Start Capacitor V	-	
Run Capacitor	-	
Run Capacitor V	-	
Number of Leads	12	
Connection	DD/D	
Coil Resistance	-	
Date Code	-	
Load	Efficiency %	P.F.
50%	87.1	0.71
75%	89.66	0.81
100%	90.53	0.86
FULL LOAD TEMPERATURE RISE		
FL Temp Rise °C	52.0	-
3D Image Link		
<a href="#">GR3-CI-TF-254TC-2-BR-D-15</a>		

GENERAL DATA			
Frame Size	254TC		
Frame Enclosure	TEFC		
Mounting	Rigid/C-Flange		
Insulation Class	F		
Duty	Cont. / S1		
NEMA Design	A		
Frame Material	Cast Iron		
Ingress Protection	55		
Tropicalization	true		
Cable Entry	1-NPT 1-1/4"		
Feet Removable	true		
Double Drilled	-		
Paint Color	Graphite Gray		
Paint RAL	7024		
Weight lb	254.678		
MECHANICAL DATA			
DE Bearing	6309C3		
NDE Bearing	6309C3		
dB No-Load	-		
Rotor Wk <sup>2</sup> , Lb-Ft <sup>2</sup>	-		
Comp Ring (wavy washer)	-		
TORQUE VALUES		Torque lb-ft	% FLT
Locked Rotor Torque		75.0398	337.0
Pull-Up Torque		42.9753	193.0
Breakdown Torque		88.1773	396.0
Full Load Torque		22.267	100.0
SITE CONDITIONS			
Ambient Temp °C		40	
Altitude Above Sea Level m		1000	

\*This report valid for above Date Code and newer models, please contact Techttop for more info.




NEMA Premium

<b>MOTOR MODEL:</b>	GR3-CI-TF-254TC-2-BR-D-15
<b>FACTORY TYPE:</b>	TXC

**NEMA**

Premium NEMA Cast Iron, TEFC

Torque Speed (T-n) Curve

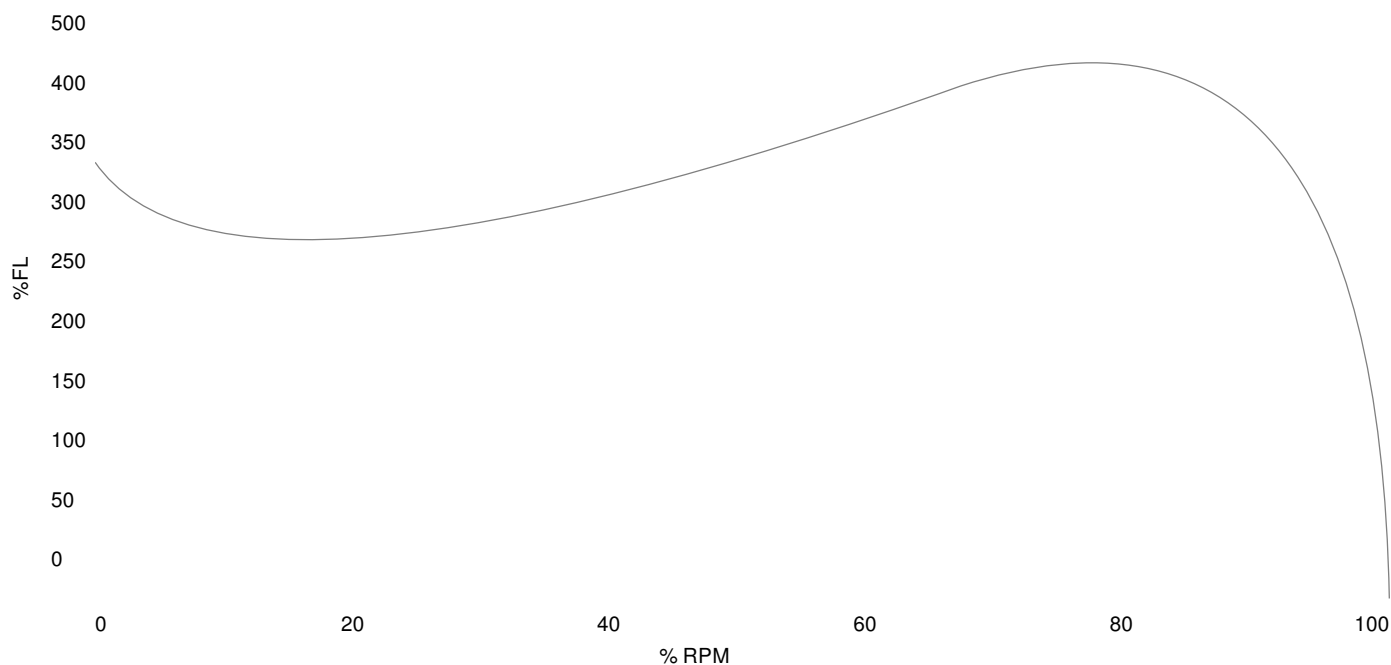

Performance Load Values, High Voltage, 60Hz

Torque Values	Torque lb-ft	% FLT	Performance Values
Locked Rotor Torque	75.0398	337.0	Start Configuration
Pull-Up Torque	42.9753	193.0	Starting Current (A)
Breakdown Torque	88.1773	396.0	No-Load Current (A)
Full Load	22.267	100.0	No-Load Power Factor

% Load	Horsepower	Current, Amps	Input power, Kilowatts	Speed, RPM	Efficiency	PF
0	-	8.01	-	-	-	-
25	3.75	9.11	3.58	3592.6	78.93	0.49
50	7.5	11.59	6.49	3585.6	87.1	0.71
75	11.25	14.7	9.45	3578.2	89.66	0.81
100	15.0	18.29	12.48	3570.4	90.53	0.86
125	18.75	22.21	15.58	3562.3	90.67	0.88

Techtop Industries  
 2815 Colonnades Court  
 Peachtree Corners, GA 30071  
 Tel: 678-436-5540  
 E-Mail: info@techttopind.com