



NEMA Premium

**NEMA**

<b>MOTOR MODEL:</b>	GR3-CI-TF-286TC-4-BR-D-30
<b>FACTORY TYPE:</b>	TXC

### Premium NEMA Cast Iron, TEFC

ELECTRICAL DATA		
	60 Hz	50 Hz
Horsepower	30.0	30.0
Speed, RPM	1770	1460
Voltage	230/460	190/380
# Phase	3	
Full Load Amps	68.99/34.49	84/42
Power Factor	0.85	-
Nominal Efficiency	93.6	90.5
3/4 Load Efficiency	-	-
Service Factor	1.25	1.0
KVA Code	K	F
FL Amps. @ 208 V	76.2853	-
Locked Rotor Current	329.683	-
Start Capacitor	-	
Start Capacitor V	-	
Run Capacitor	-	
Run Capacitor V	-	
Number of Leads	12	
Connection	DD/D	
Coil Resistance	-	
Date Code	-	
Load	Efficiency %	P.F.
50%	92.75	0.71
75%	93.63	0.82
100%	93.58	0.86
FULL LOAD TEMPERATURE RISE		
FL Temp Rise °C	60.0	-
3D Image Link		
<a href="#">GR3-CI-TF-286TC-4-BR-D-30</a>		

GENERAL DATA		
Frame Size	286TC	
Frame Enclosure	TEFC	
Mounting	Rigid/C-Flange	
Insulation Class	F	
Duty	Cont. / S1	
NEMA Design	A	
Frame Material	Cast Iron	
Ingress Protection	55	
Tropicalization	true	
Cable Entry	1-NPT 1-1/2"	
Feet Removable	true	
Double Drilled	true	
Paint Color	Graphite Gray	
Paint RAL	7024	
Weight lb	396.9	
MECHANICAL DATA		
DE Bearing	6311C3	
NDE Bearing	6311C3	
dB No-Load	-	
Rotor Wk <sup>2</sup> , Lb-Ft <sup>2</sup>	-	
Comp Ring (wavey washer)	-	
TORQUE VALUES		% FLT
Locked Rotor Torque	265.96	299.0
Pull-Up Torque	190.353	214.0
Breakdown Torque	323.778	364.0
Full Load Torque	88.95	100.0
SITE CONDITIONS		
Ambient Temp °C	40	
Altitude Above Sea Level m	1000	

\*This report valid for above Date Code and newer models, please contact Techtop for more info.

Techtop Industries  
 2815 Colonnades Court  
 Peachtree Corners, GA 30071  
 Tel: 678-436-5540  
 E-Mail: info@techttopind.com



NEMA Premium


<b>MOTOR MODEL:</b>	GR3-CI-TF-286TC-4-BR-D-30
<b>FACTORY TYPE:</b>	TXC

**NEMA**

Premium NEMA Cast Iron, TEFC

Non Sinusoidal (VFD) Output 30.0HP, 1770 RPM

Torque Speed (T-n) Curve

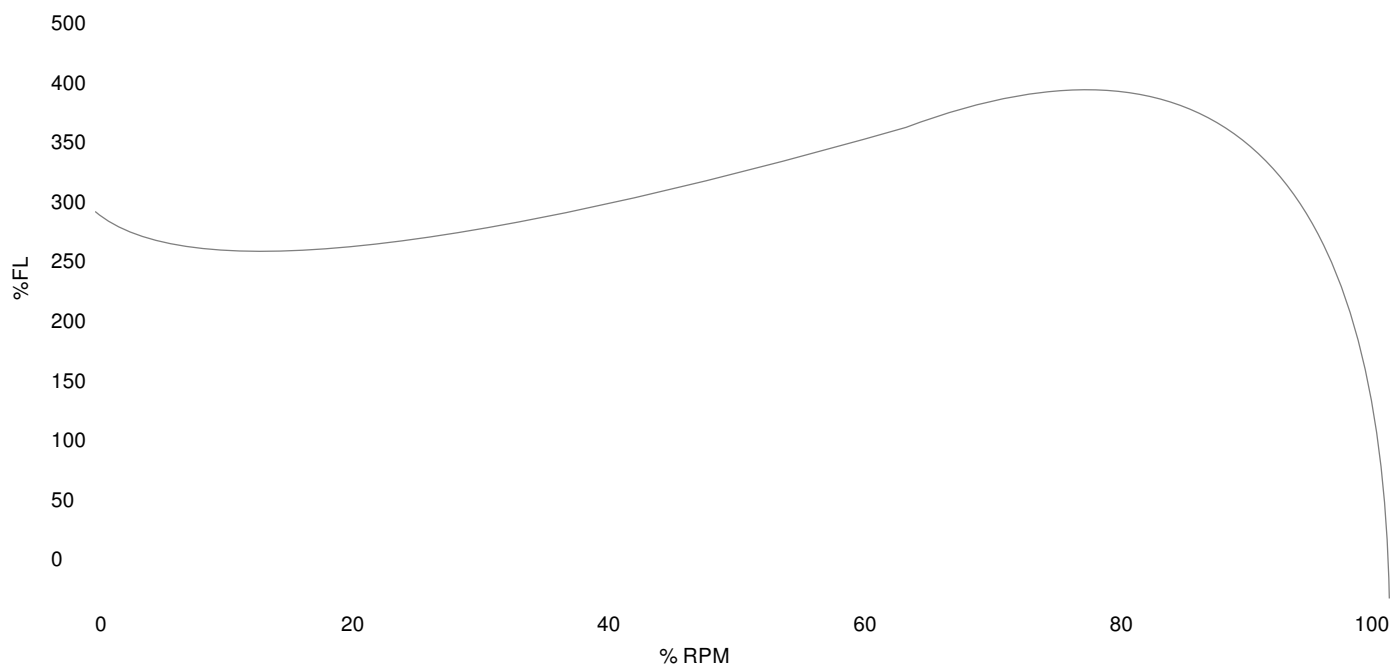

Performance Load Values, High Voltage, 60Hz

Torque Values	Torque lb-ft	% FLT	Performance Values
Locked Rotor Torque	265.96	299.0	Start Configuration
Pull-Up Torque	190.353	214.0	Starting Current (A)
Breakdown Torque	323.778	364.0	No-Load Current (A)
Full Load	88.95	100.0	No-Load Power Factor

% Load	Horsepower	Current, Amps	Input power, Kilowatts	Speed, RPM	Efficiency	PF
0	-	14.41	-	-	-	-
25	7.5	16.23	6.29	1794.1	88.63	0.49
50	15.0	21.24	12.02	1788.4	92.75	0.71
75	22.5	27.51	17.86	1782.2	93.63	0.82
100	30.0	34.74	23.83	1775.7	93.58	0.86
125	37.5	42.61	29.93	1768.8	93.13	0.88

Techtop Industries  
 2815 Colonnades Court  
 Peachtree Corners, GA 30071  
 Tel: 678-436-5540  
 E-Mail: info@techttopind.com