

NAMEPLATE DATA		
	60 Hz.	50 Hz.
Horsepower	25.0	25.0
Frame Size	324T	
Speed, RPM	1180	965
Voltage	3 Phase US	190/380
# Phase	3	
Full Load Amps	61.39/30.69	74/37
Power Factor	0.81	-
Nominal Efficiency	93.0	90.0
3/4 Load Efficiency	-	-
Service Factor	1.25	1.0
Duty	Cont. / S1	
FL Temp Rise °C	52.0	-
Enclosure	TEFC	
Ambient Temp °C	40	
KVA Code	M	E
FL Amps. @ 208 V	67.8825	-
Insulation Class	F	
NEMA Design	A	
Weight	500.535	
DE Bearing	6312C3	
NDE Bearing	6312C3	
dB No-Load	-	
Rotor Wk ² , Lb-Ft ²	-	
Start Capacitor		
Start Capacitor V	-	
Run Capacitor		
Run Capacitor V	-	
Number of Leads	12	
Connection	??/?	
Coil Resistance	0.1935	

Motor Model:	GR3-CI-TF-324T-6-BR-D-25
---------------------	---------------------------------

Performance Load Values:


% Load	Horsepower	Current, Amps	Input power, Kilowatts	Speed, RPM	Efficiency	PF
0	12.5	14.61	-	-	-	-
25	12.5	16.05	5.35	1196.5	86.95	0.42
50	12.5	19.84	10.14	1193.1	91.71	0.64
75	18.75	24.87	15.04	1189.5	92.78	0.76
100	25.0	30.81	20.04	1185.7	92.81	0.82
125	12.5	34.69	23.1	1183.3	92.58	0.84
150	12.5	37.36	25.17	1181.7	92.37	0.85
SF	-	-	-	-	-	-

	Torque, Lb-Ft	% Full Load Torque	Speed, RPM	Current Amps.
Locked Rotor Torque	374.193	338.0	-	1173.0
Pull Up Torque	218.095	197.0	-	-
Breakdown Torque	464.974	420.0	-	-
Full Load	110.708	100.0	1185.7	30.81

Speed Torque Curve

Please contact Techtop for image.

Dimensional Drawing

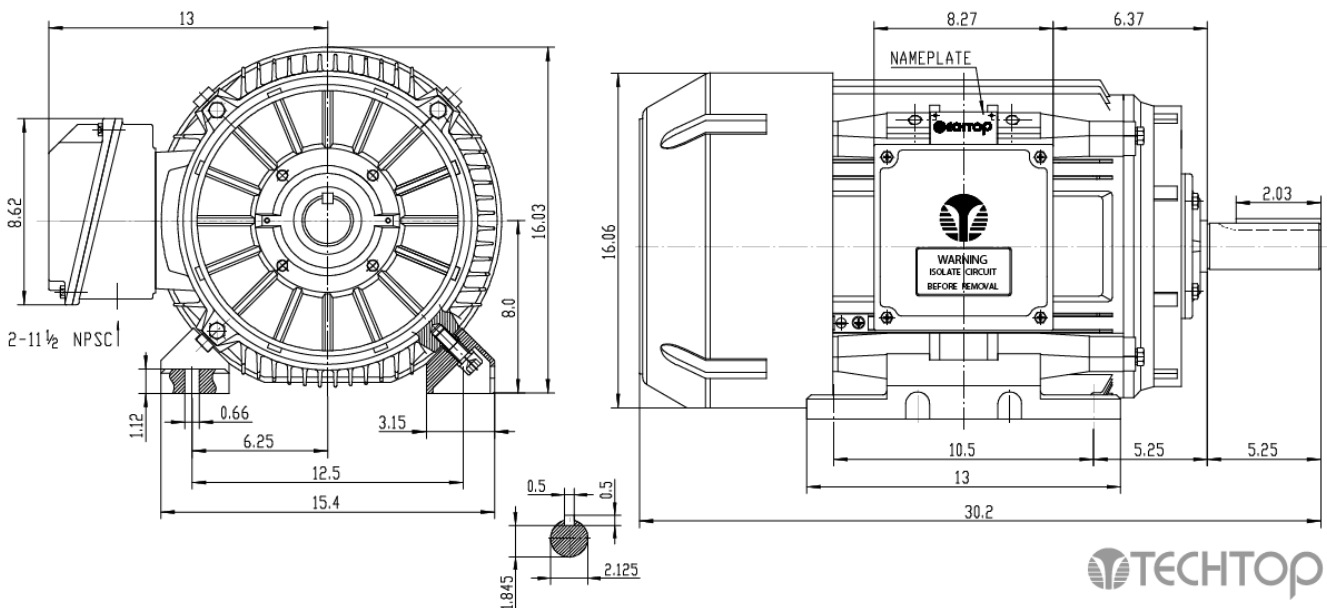

Dimensions are for reference only. Allowance should be made for minor deviations in non standard specified properties.

3D Image Link: Not available for this motor