

NAMEPLATE DATA		
	60 Hz	50 Hz
Horsepower	40.0	40.0
Frame Size	324TS	
Speed, RPM	3560	-
Voltage	575	-
# Phase	3	
Full Load Amps	36.02930345	-
Power Factor	0.89	-
Nominal Efficiency	92.4	-
3/4 Load Efficiency	-	-
Service Factor	1.25	1.0
Duty	Cont. / S1	
FL Temp Rise °C	67.0	-
Enclosure	TEFC	
Ambient Temp °C	40	
KVA Code	H	-
FL Amps. @ 208 V	-	-
Insulation Class	F	
NEMA Design	A	
Weight	485.1	
DE Bearing	6312C3	
NDE Bearing	6312C3	
dB No-Load	-	
Rotor Wk ² , Lb-Ft ²	-	
Start Capacitor	-	
Start Capacitor V	-	
Run Capacitor	-	
Run Capacitor V	-	
Number of Leads	6	
Connection	?	
Coil Resistance	-	

Motor Model:	GR3-CI-TF-324TS-2-BR-F-40
---------------------	----------------------------------

Performance Load Values:


% Load	Horsepower	Current, Amps	Input power, Kilowatts	Speed, RPM	Efficiency	PF
0	-	12.48	-	-	-	-
25	10.0	16.87	8.88	3588.8	84.46	0.66
50	20.0	25.43	16.6	3578.7	90.37	0.82
75	30.0	35.03	24.46	3567.6	91.99	0.88
100	40.0	45.56	32.49	3555.4	92.34	0.9
125	50.0	56.88	40.71	3542.2	92.13	0.9
150	60.0	68.89	49.13	3527.8	91.59	0.9
SF	-	-	-	-	-	-

	Torque, Lb-Ft	% Full Load Torque	Speed, RPM	Current Amps.
Locked Rotor Torque	140.239	235.0	-	344.434
Pull Up Torque	74.5952	125.0	-	-
Breakdown Torque	140.836	236.0	-	-
Full Load	59.6762	100.0	3555.4	45.56

Speed Torque Curve

Please contact Techtop for image.

Dimensional Drawing

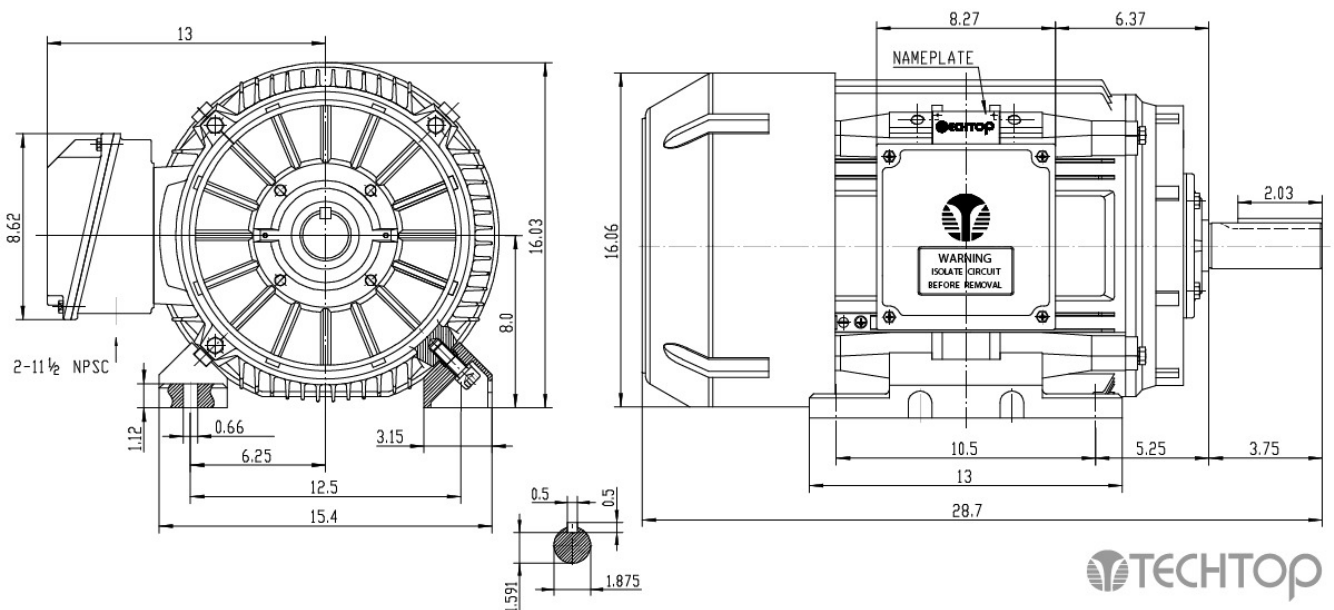

Dimensions are for reference only. Allowance should be made for minor deviations in non standard specified properties.

3D Image Link: Not available for this motor