



NEMA Premium

**NEMA**

<b>MOTOR MODEL:</b>	GR3-CI-TF-364T-6-BR-F-40
<b>FACTORY TYPE:</b>	TXC

### Premium NEMA Cast Iron, TEFC

ELECTRICAL DATA		
	60 Hz	50 Hz
Horsepower	40.0	40.0
Speed, RPM	1180	-
Voltage	575	-
# Phase	3	
Full Load Amps	37.45948459	-
Power Factor	0.84	-
Nominal Efficiency	94.1	-
3/4 Load Efficiency	-	-
Service Factor	1.15	1.0
KVA Code	J	-
FL Amps. @ 208 V	-	-
LRC @ 60Hz HV	-	-
Start Capacitor	-	
Start Capacitor V	-	
Run Capacitor	-	
Run Capacitor V	-	
Number of Leads	6	
Connection	D	
Coil Resistance	-	
Date Code	-	
Load	Efficiency %	P.F.
50%	-	-
75%	-	-
100%	-	-
FULL LOAD TEMPERATURE RISE		
FL Temp Rise °C	-	
3D Image Link		
<a href="#">GR3-CI-TF-364T-6-BR-F-40</a>		

GENERAL DATA			
Frame Size	364T		
Frame Enclosure	TEFC		
Mounting	Rigid		
Insulation Class	F		
Duty	Cont. / S1		
NEMA Design	A		
Frame Material	Cast Iron		
Ingress Protection	55		
Tropicalization	true		
Cable Entry	1-NPT 2"		
Feet Removable	-		
Double Drilled	-		
Paint Color	Graphite Gray		
Paint RAL	7024		
Weight lb	725.445		
MECHANICAL DATA			
DE Bearing	6313C3		
NDE Bearing	6313C3		
dB No-Load	-		
Rotor Wk <sup>2</sup> , Lb-Ft <sup>2</sup>	-		
Comp Ring (wavey washer)	DE		
TORQUE VALUES		Torque lb-ft	% FLT
Locked Rotor Torque		-	-
Pull-Up Torque		-	-
Breakdown Torque		-	-
Full Load Torque		-	100.0
SITE CONDITIONS			
Ambient Temp °C		40	
Altitude Above Sea Level m		1000	

\*This report valid for above Date Code and newer models, please contact Techtop for more info.




NEMA Premium

**NEMA**

<b>MOTOR MODEL:</b>	GR3-CI-TF-364T-6-BR-F-40
<b>FACTORY TYPE:</b>	TXC

Premium NEMA Cast Iron, TEFC

Torque Speed (T-n) Curve

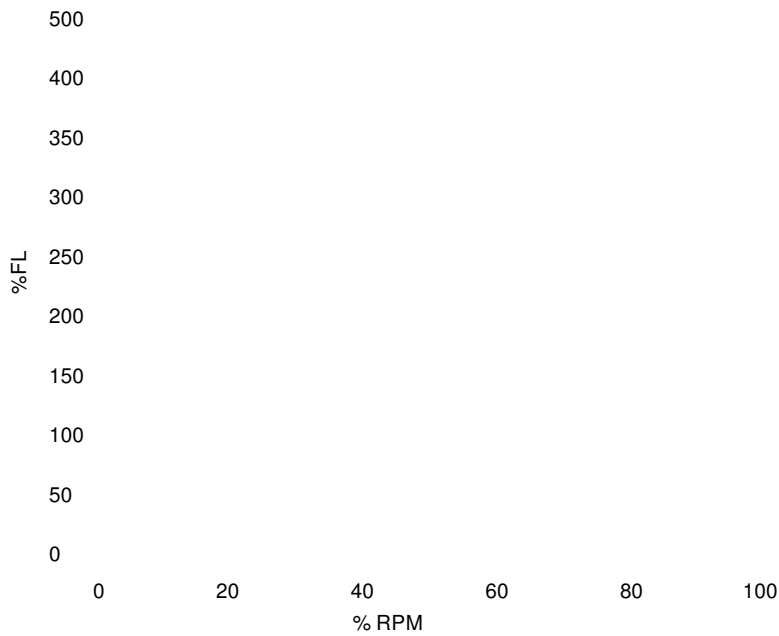

Performance Load Values, High Voltage, 60Hz

Torque Values	Torque lb-ft	% FLT	Performance Values
Locked Rotor Torque	-	-	Start Configuration
Pull-Up Torque	-	-	Starting Current (A)
Breakdown Torque	-	-	No-Load Current (A)
Full Load	-	100.0	No-Load Power Factor

% Load	Horsepower	Current, Amps	Input power, Kilowatts	Speed, RPM	Efficiency	PF
0	-	16.39	-	-	-	-
25	10.0	-	-	-	-	-
50	20.0	-	-	-	-	-
75	30.0	-	-	-	-	-
100	40.0	-	-	-	-	-
125	50.0	-	-	-	-	-