

## Techtop Industries Nameplate and Performance Data

NAMEPLATE DATA		
	60 Hz.	50 Hz.
Horsepower	75.0	75.0
Frame Size	365TS	
Speed, RPM	3560	-
Voltage	3 Phase US (575V)	-
# Phase	3	
Full Load Amps	66.68885495	-
Power Factor	0.9	-
Nominal Efficiency	93.6	-
3/4 Load Efficiency	-	-
Service Factor	1.15	1.0
Duty	Cont. / S1	
FL Temp Rise °C	62.0	-
Enclosure	TEFC	
Ambient Temp °C	40	
KVA Code	K	-
FL Amps. @ 208 V	-	-
Insulation Class	F	
NEMA Design	A	
Weight	784.98	
DE Bearing	6313C3	
NDE Bearing	6313C3	
dB No-Load	-	
Rotor Wk <sup>2</sup> , Lb-Ft <sup>2</sup>	-	
Start Capacitor	-	
Start Capacitor V	-	
Run Capacitor	-	
Run Capacitor V	-	
Number of Leads	6	
Connection	?	
Coil Resistance	-	

<b>Motor Model:</b>	<b>GR3-CI-TF-365TS-2-BR-F-75</b>
---------------------	----------------------------------

Performance Load Values:


% Load	Horsepower	Current, Amps	Input power, Kilowatts	Speed, RPM	Efficiency	PF
0	37.5	21.47	-	-	-	-
25	37.5	29.98	15.92	3593.2	87.92	0.67
50	37.5	45.56	30.26	3586.7	92.53	0.83
75	56.25	63.16	44.83	3579.8	93.68	0.89
100	75.0	63.16	44.83	3579.8	93.68	0.89
125	37.5	102.35	74.74	3565.1	93.66	0.92
150	37.5	122.91	90.09	3557.2	93.24	0.92
SF	-	-	-	-	-	-

	Torque, Lb-Ft	% Full Load Torque	Speed, RPM	Current Amps.
Locked Rotor Torque	447.777	408.0	-	1145.0
Pull Up Torque	210.719	192.0	-	-
Breakdown Torque	409.365	373.0	-	-
Full Load	109.749	100.0	3572.6	82.26

### Speed Torque Curve

Please contact Techtop for image.

### Dimensional Drawing

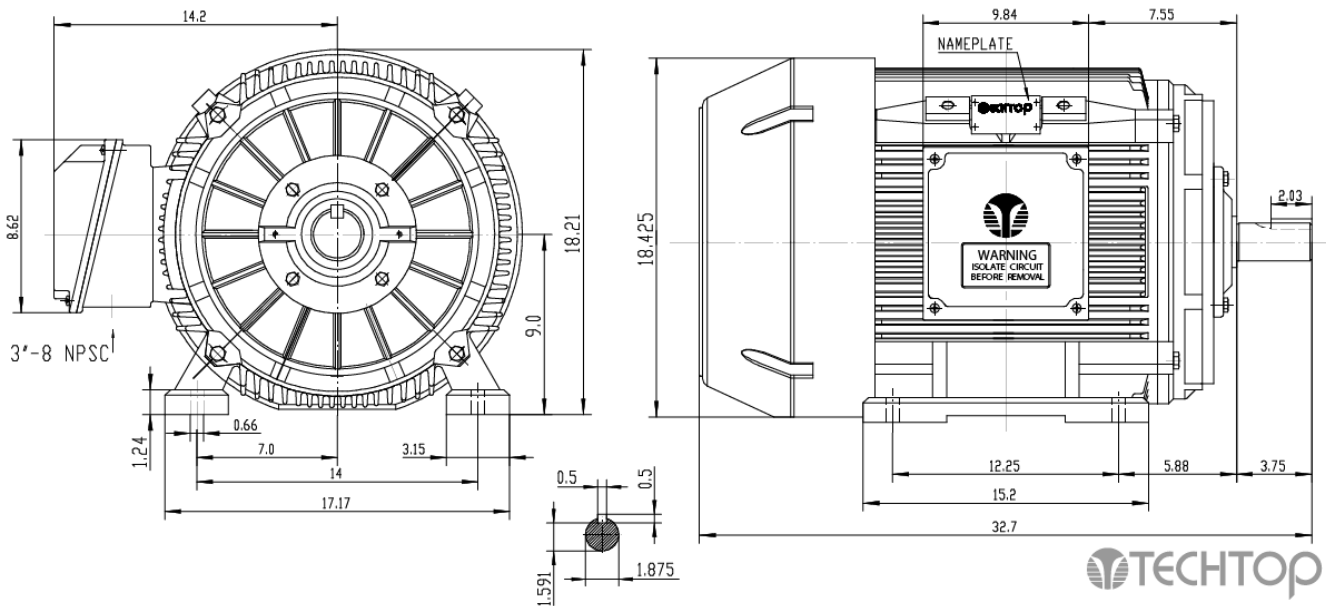

Dimensions are for reference only. Allowance should be made for minor deviations in non standard specified properties.

3D Image Link: Not available for this motor

