

## Techtop Industries Nameplate and Performance Data

NAMEPLATE DATA		
	60 Hz	50 Hz
Horsepower	100.0	100.0
Frame Size	405TS	
Speed, RPM	3570	-
Voltage	575	-
# Phase	3	
Full Load Amps	87.47407117	-
Power Factor	0.9	-
Nominal Efficiency	94.1	-
3/4 Load Efficiency	-	-
Service Factor	1.15	1.0
Duty	Cont. / S1	
FL Temp Rise °C	67.0	-
Enclosure	TEFC	
Ambient Temp °C	40	
KVA Code	K	-
FL Amps. @ 208 V	-	-
Insulation Class	F	
NEMA Design	A	
Weight	1020.91	
DE Bearing	6314C3	
NDE Bearing	6314C3	
dB No-Load	-	
Rotor Wk <sup>2</sup> , Lb-Ft <sup>2</sup>	-	
Start Capacitor	-	
Start Capacitor V	-	
Run Capacitor	-	
Run Capacitor V	-	
Number of Leads	6	
Connection	?	
Coil Resistance	-	

<b>Motor Model:</b>	<b>GR3-CI-TF-405TS-2-BR-F-100</b>
---------------------	-----------------------------------

Performance Load Values:


% Load	Horsepower	Current, Amps	Input power, Kilowatts	Speed, RPM	Efficiency	PF
0	-	24.33	-	-	-	-
25	25.0	36.85	21.13	3592.6	88.75	0.72
50	50.0	59.11	40.34	3585.3	92.96	0.86
75	75.0	83.45	59.87	3577.4	93.96	0.9
100	100.0	109.64	79.74	3568.9	94.05	0.91
125	125.0	137.44	100.0	3559.8	93.75	0.91
150	150.0	166.62	120.67	3550.1	93.23	0.91
SF	-	-	-	-	-	-

	Torque, Lb-Ft	% Full Load Torque	Speed, RPM	Current Amps.
Locked Rotor Torque	479.374	324.0	-	1031.34
Pull Up Torque	303.308	205.0	-	-
Breakdown Torque	449.783	304.0	-	-
Full Load	147.955	100.0	3568.9	109.6

### Speed Torque Curve

Please contact Techtop for image.

### Dimensional Drawing

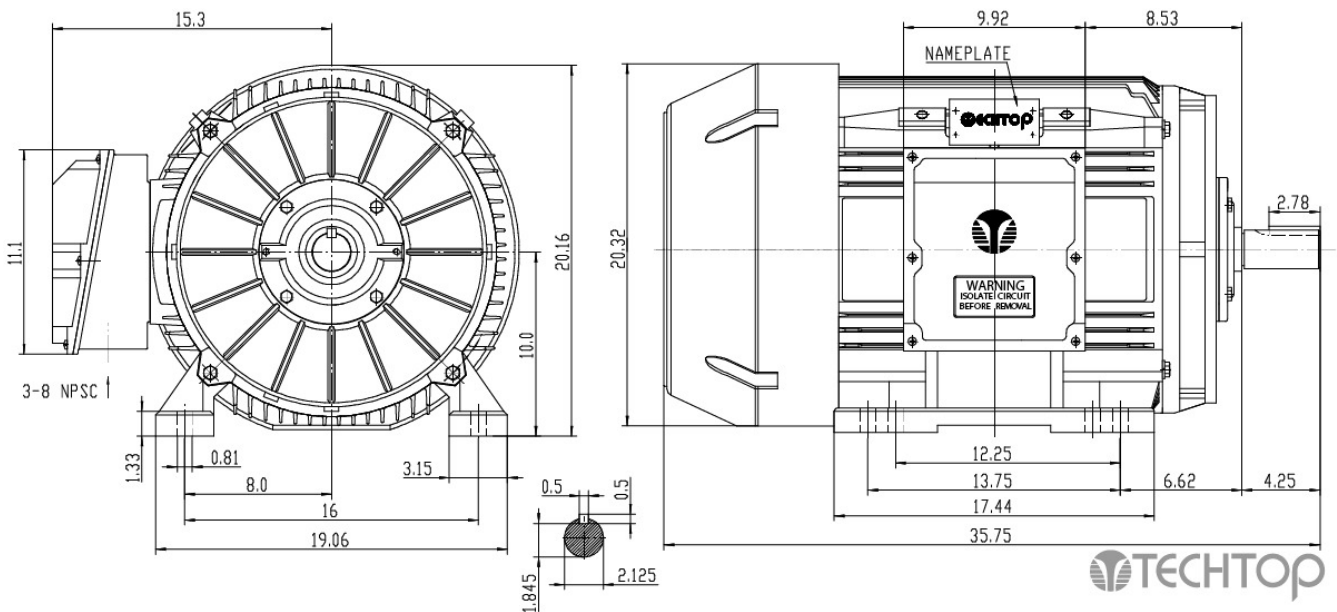

Dimensions are for reference only. Allowance should be made for minor deviations in non standard specified properties.

3D Image Link: Not available for this motor

Techtop Industries  
2815 Colonnades Court  
Peachtree Corners, GA 30071  
Tel: 678-436-5540  
E-Mail: info@techttopind.com