



NEMA Premium

**NEMA**

<b>MOTOR MODEL:</b>	GR3-CI-TF-447T-6-RR-F-150
<b>FACTORY TYPE:</b>	TXC

Premium NEMA Cast Iron, TEFC

ELECTRICAL DATA		
	60 Hz	50 Hz
Horsepower	150.0	150.0
Speed, RPM	1180	-
Voltage	575	-
# Phase	3	
Full Load Amps	136.3759077	-
Power Factor	0.87	-
Nominal Efficiency	95.8	-
3/4 Load Efficiency	-	-
Service Factor	1.15	1.0
KVA Code	H	-
FL Amps. @ 208 V	-	-
LRC @ 60Hz HV	1553.37	-
Start Capacitor	-	
Start Capacitor V	-	
Run Capacitor	-	
Run Capacitor V	-	
Number of Leads	6	
Connection	D	
Coil Resistance	-	
Date Code	-	
Load	Efficiency %	P.F.
50%	94.27	0.68
75%	95.08	0.79
100%	95.13	0.83
FULL LOAD TEMPERATURE RISE		
FL Temp Rise °C	86.0	-
3D Image Link		
<a href="#">GR3-CI-TF-447T-6-RR-F-150</a>		

GENERAL DATA			
Frame Size	447T		
Frame Enclosure	TEFC		
Mounting	Rigid		
Insulation Class	F		
Duty	Cont. / S1		
NEMA Design	A		
Frame Material	Cast Iron		
Ingress Protection	55		
Tropicalization	true		
Cable Entry	2-NPT 3"		
Feet Removable	-		
Double Drilled	true		
Paint Color	Graphite Gray		
Paint RAL	7024		
Weight lb	2041.83		
MECHANICAL DATA			
DE Bearing	NU319		
NDE Bearing	6319C3		
dB No-Load	-		
Rotor Wk <sup>2</sup> , Lb-Ft <sup>2</sup>	-		
Comp Ring (wavey washer)	None		
TORQUE VALUES		Torque lb-ft	% FLT
Locked Rotor Torque		2127.76	279.0
Pull-Up Torque		1677.81	220.0
Breakdown Torque		2547.22	334.0
Full Load Torque		762.639	100.0
SITE CONDITIONS			
Ambient Temp °C		40	
Altitude Above Sea Level m		1000	

\*This report valid for above Date Code and newer models, please contact Techtop for more info.




NEMA Premium

**NEMA**

<b>MOTOR MODEL:</b>	GR3-CI-TF-447T-6-RR-F-150
<b>FACTORY TYPE:</b>	TXC

Premium NEMA Cast Iron, TEFC

Torque Speed (T-n) Curve

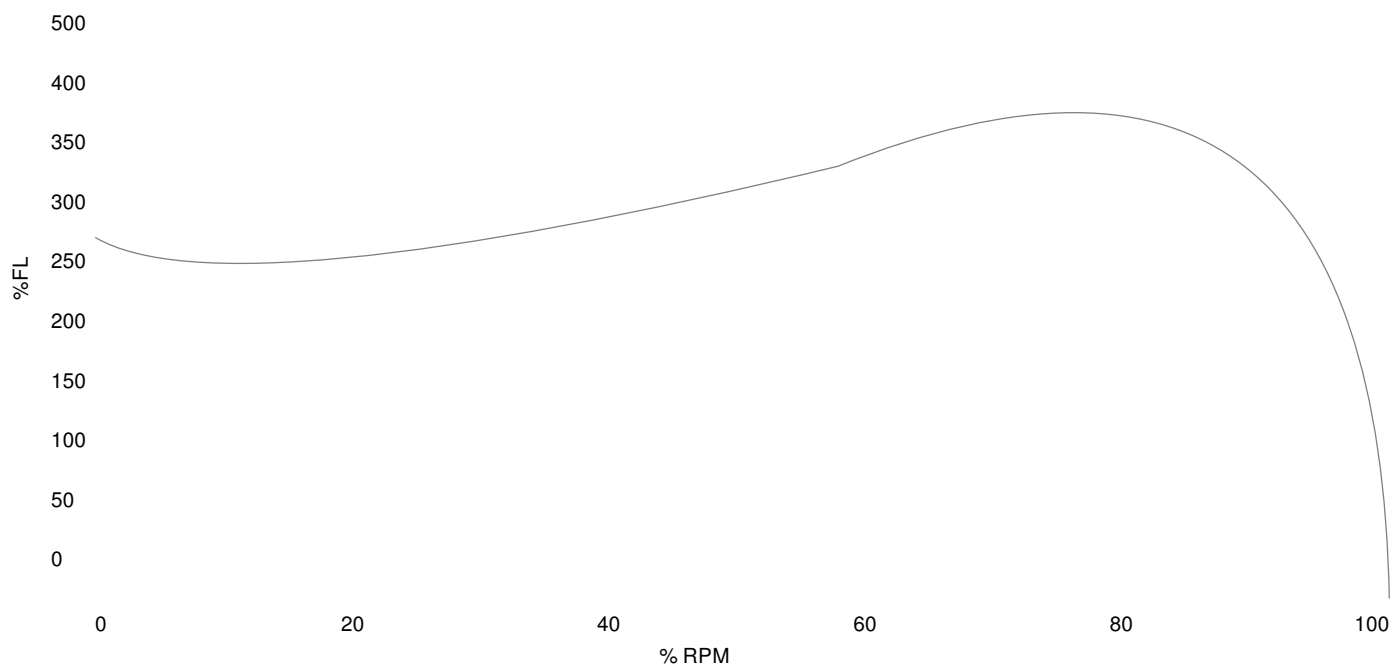

Performance Load Values, High Voltage, 60Hz

Torque Values	Torque lb-ft	% FLT	Performance Values	
Locked Rotor Torque	2127.76	279.0	Start Configuration	-
Pull-Up Torque	1677.81	220.0	Starting Current (A)	-
Breakdown Torque	2547.22	334.0	No-Load Current (A)	-
Full Load	762.639	100.0	No-Load Power Factor	-

% Load	Horsepower	Current, Amps	Input power, Kilowatts	Speed, RPM	Efficiency	PF
0	-	84.78	-	-	-	-
25	37.5	96.55	35.54	1197.9	90.75	0.46
50	75.0	125.58	68.42	1196.0	94.27	0.68
75	112.5	162.53	101.76	1193.9	95.08	0.79
100	150.0	205.53	135.61	1191.6	95.13	0.83
125	187.5	252.72	170.0	1189.2	94.85	0.84

Techtop Industries  
 2815 Colonnades Court  
 Peachtree Corners, GA 30071  
 Tel: 678-436-5540  
 E-Mail: info@techttopind.com