



NEMA Premium

**NEMA**

<b>MOTOR MODEL:</b>	WX3-AL-TF-182T-6-B-D-1.5
<b>FACTORY TYPE:</b>	TXA

Premium NEMA Cast Aluminum, TEFC

ELECTRICAL DATA		
	60 Hz	50 Hz
Horsepower	1.5	1.5
Speed, RPM	1175	970
Voltage	230/460	190/380
# Phase	3	
Full Load Amps	4.64/2.32	5.37/2.67
Power Factor	0.68	-
Nominal Efficiency	87.5	87.0
3/4 Load Efficiency	-	-
Service Factor	1.25	1.0
KVA Code	L	J
FL Amps. @ 208 V	4.76	-
Locked Rotor Current	16.9824	-
Start Capacitor	-	
Start Capacitor V	-	
Run Capacitor	-	
Run Capacitor V	-	
Number of Leads	9	
Connection	YY/Y	
Coil Resistance	-	
Date Code	-	
Load	Efficiency %	P.F.
50%	-	-
75%	-	-
100%	-	-
FULL LOAD TEMPERATURE RISE		
FL Temp Rise °C	16.0	16.0
3D Image Link		
<a href="#">WX3-AL-TF-182T-6-B-D-1.5</a>		

GENERAL DATA			
Frame Size	182T		
Frame Enclosure	TEFC		
Mounting	Rigid		
Insulation Class	F		
Duty	Cont. / S1		
NEMA Design	B		
Frame Material	Cast Aluminum		
Ingress Protection	56		
Tropicalization	true		
Cable Entry	1-NPT 3/4"		
Feet Removable	true		
Double Drilled	-		
Paint Color	-		
Paint RAL	-		
Weight lb	39.5		
MECHANICAL DATA			
DE Bearing	6306ZZ		
NDE Bearing	6206ZZ		
dB No-Load	-		
Rotor Wk <sup>2</sup> , Lb-Ft <sup>2</sup>	-		
Comp Ring (wavey washer)	NDE		
TORQUE VALUES		Torque lb-ft	% FLT
Locked Rotor Torque	17.6977	269.0	
Pull-Up Torque	-	-	
Breakdown Torque	12.6318	192.0	
Full Load Torque	6.57905	100.0	
SITE CONDITIONS			
Ambient Temp °C	40		
Altitude Above Sea Level m	1000		

\*This report valid for above Date Code and newer models, please contact Techtop for more info.

Techtop Industries  
2815 Colonnades Court  
Peachtree Corners, GA 30071  
Tel: 678-436-5540  
E-Mail: info@techttopind.com



NEMA Premium


<b>MOTOR MODEL:</b>	WX3-AL-TF-182T-6-B-D-1.5
<b>FACTORY TYPE:</b>	TXA

**NEMA**

Premium NEMA Cast Aluminum, TEFC

Non Sinusoidal (VFD) Output 1.5HP, 1175 RPM

Torque Speed (T-n) Curve

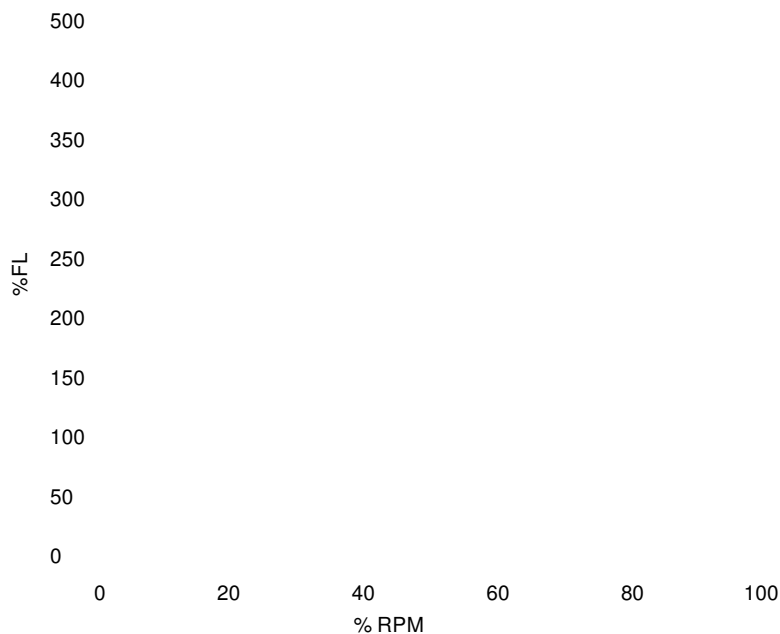

Performance Load Values, High Voltage, 60Hz

Torque Values	Torque lb-ft	% FLT	Performance Values
Locked Rotor Torque	17.6977	269.0	Start Configuration
Pull-Up Torque	-	-	Starting Current (A)
Breakdown Torque	12.6318	192.0	No-Load Current (A)
Full Load	6.57905	100.0	No-Load Power Factor

% Load	Horsepower	Current, Amps	Input power, Kilowatts	Speed, RPM	Efficiency	PF
0	-	1.57	-	-	-	-
25	0.375	-	-	-	-	-
50	0.75	-	-	-	-	-
75	1.125	-	-	-	-	-
100	1.5	-	-	-	-	-
125	1.875	-	-	-	-	-