



**Electric Motor Manufacturer
Techtop Industries Inc.**

1268 Old Alpharetta Road

Alpharetta, GA 30005

678-436-5540 Phone

866-204-1498 Fax

www.techtop.com


info@techtopind.com



NEMA Premium Cast Iron motor. 1 through 250 HP, TEFC, Cast Iron, 2, 4 and 6 poles.

NEMA Premium Integral frame cast aluminum motor. 1 through 15 HP, 2, 4 and 6 poles.



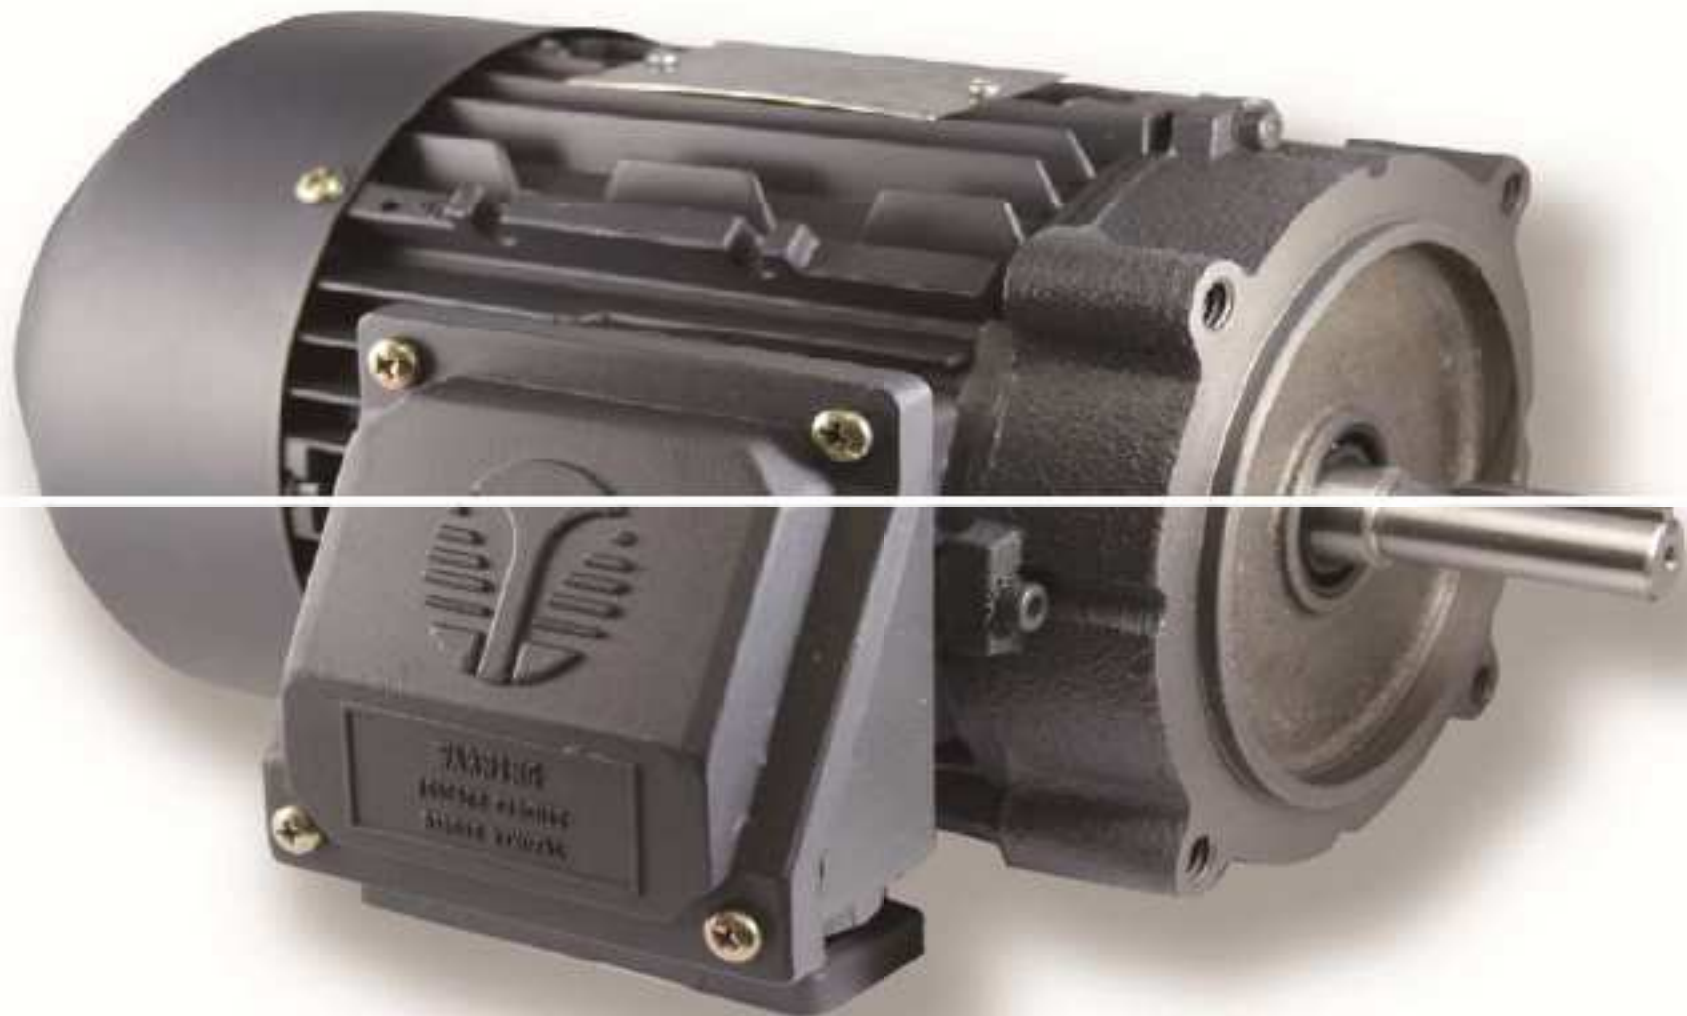

56C frame, universal mount, cast aluminum motor. 1/3 through 3HP




Single Phase, Extra High Torque, Farm and Agricultural duty motors 1/3HP through 10 HP



EISA Compliant Inverter Rated 15:1 constant. MG1 Part 31 Compliant for VFD use.




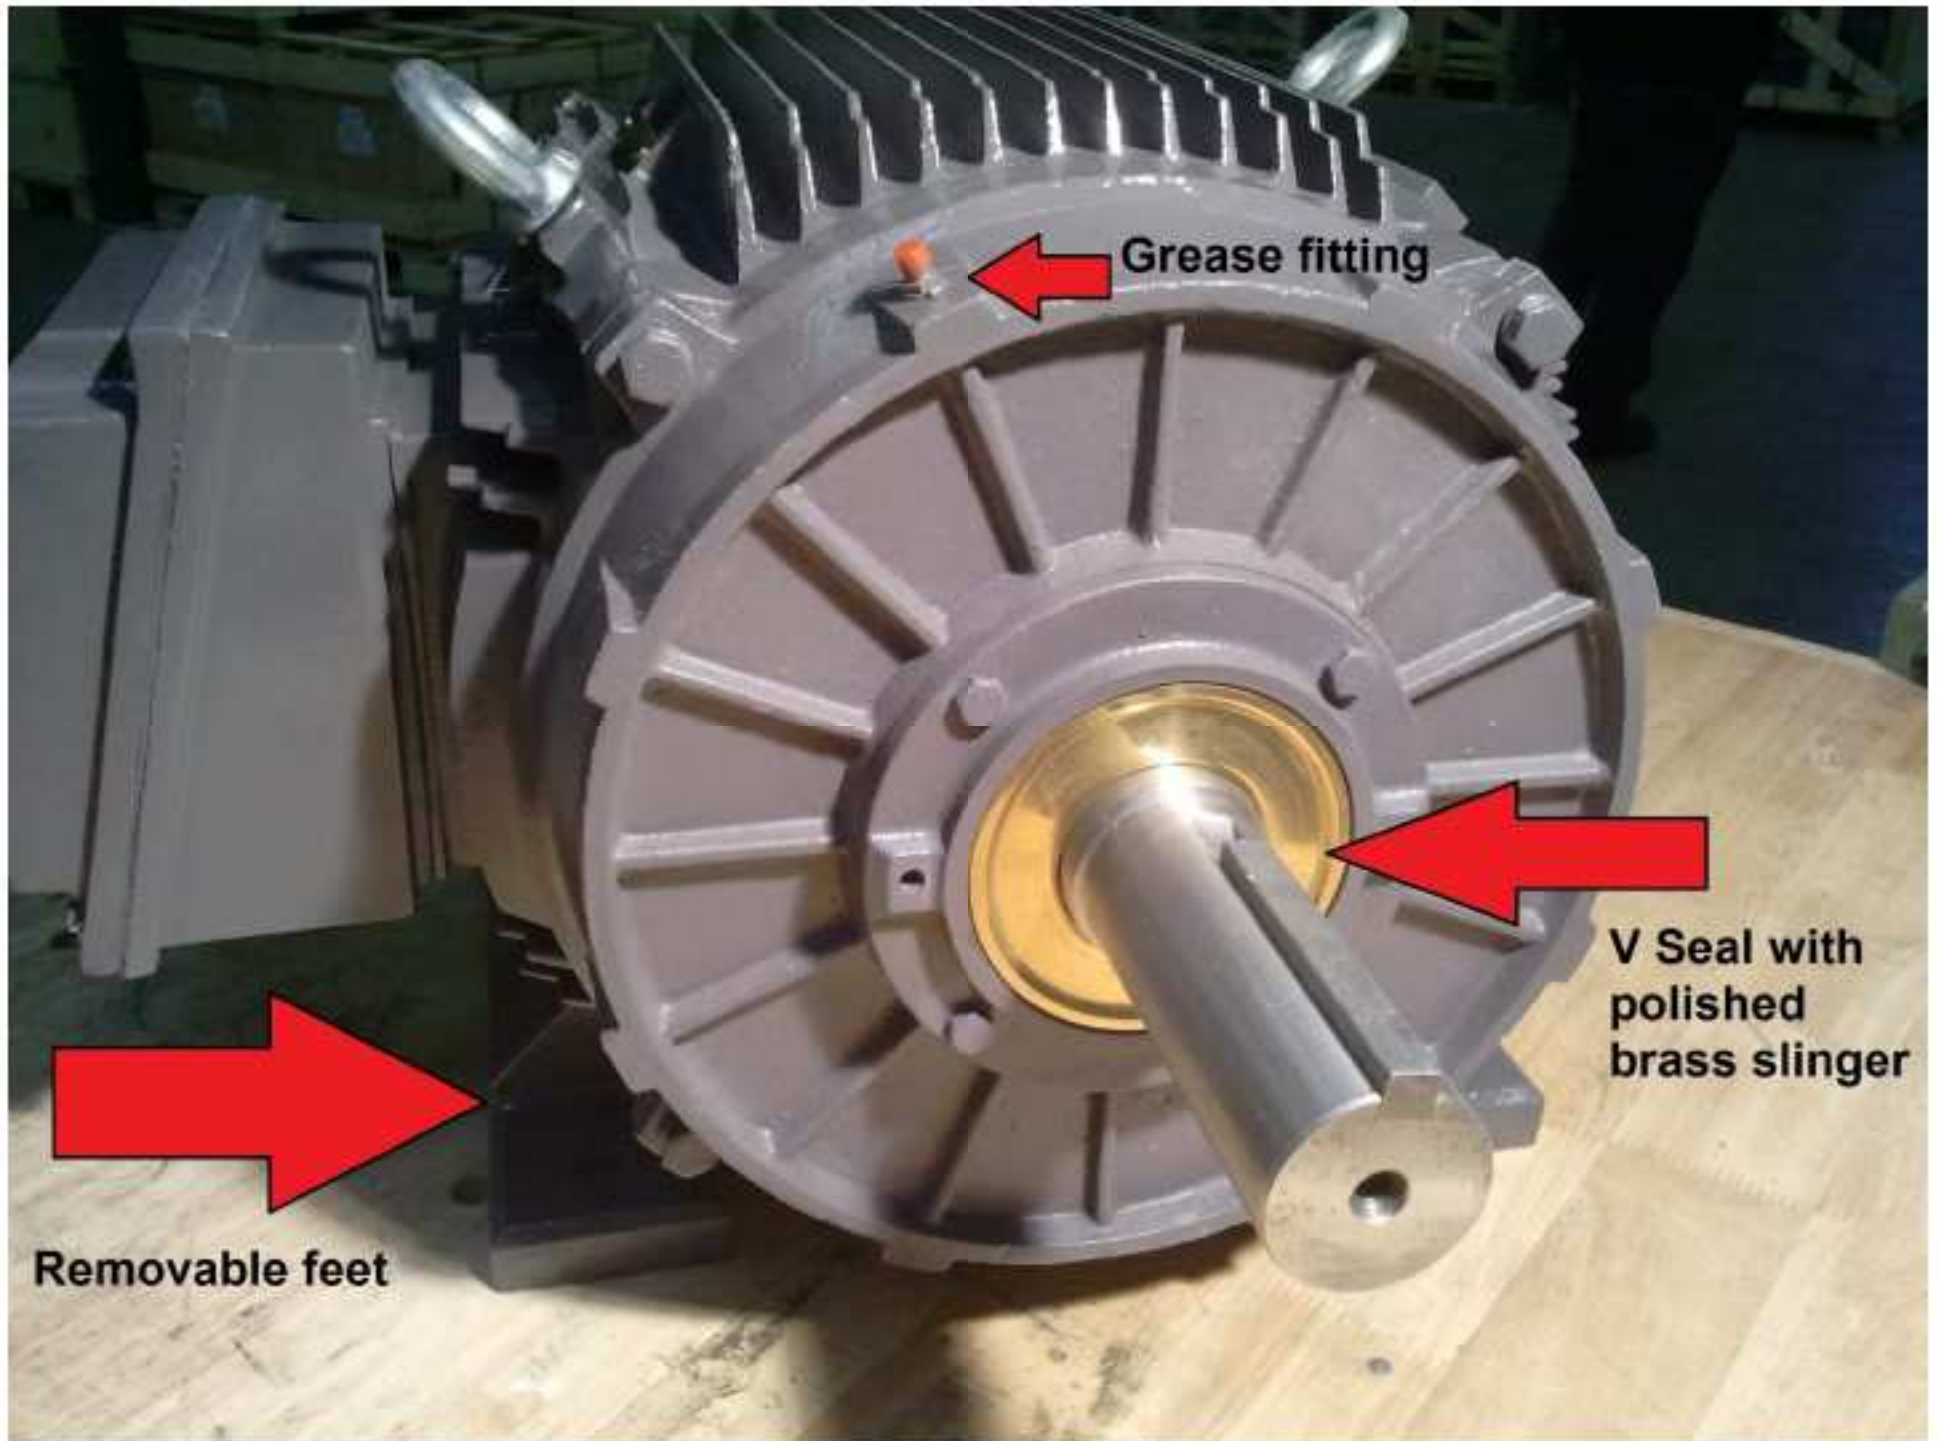

Grease fitting

V Seal with
polished
brass slinger

Removable feet

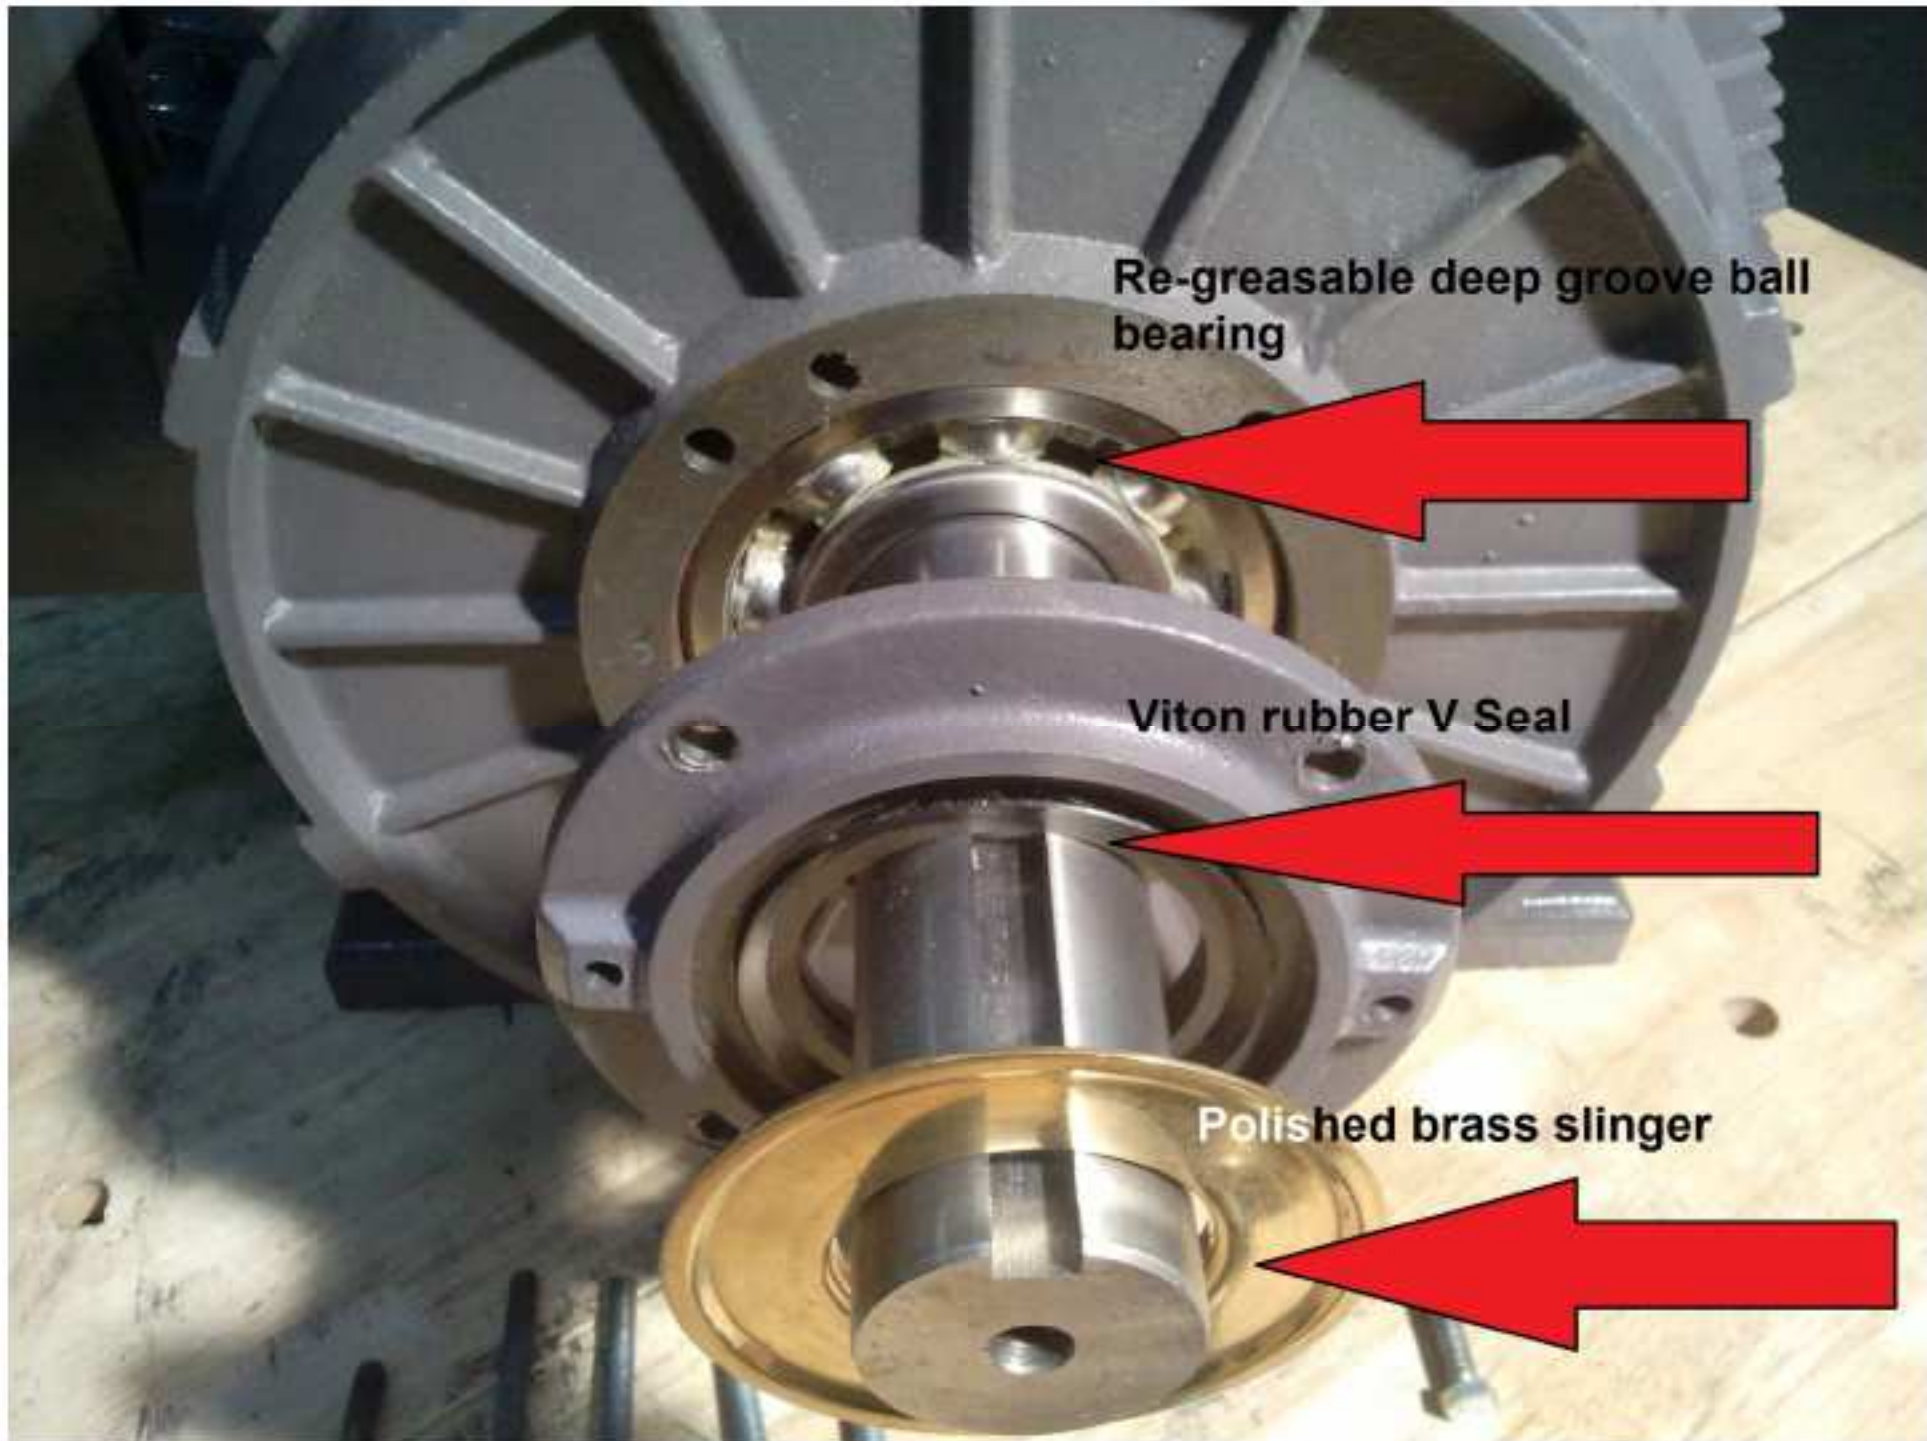


Re-greasable deep groove ball bearing

Viton rubber V Seal

Polished brass slinger



**1045 shaft through 286T
4140 shaft 326T and up**

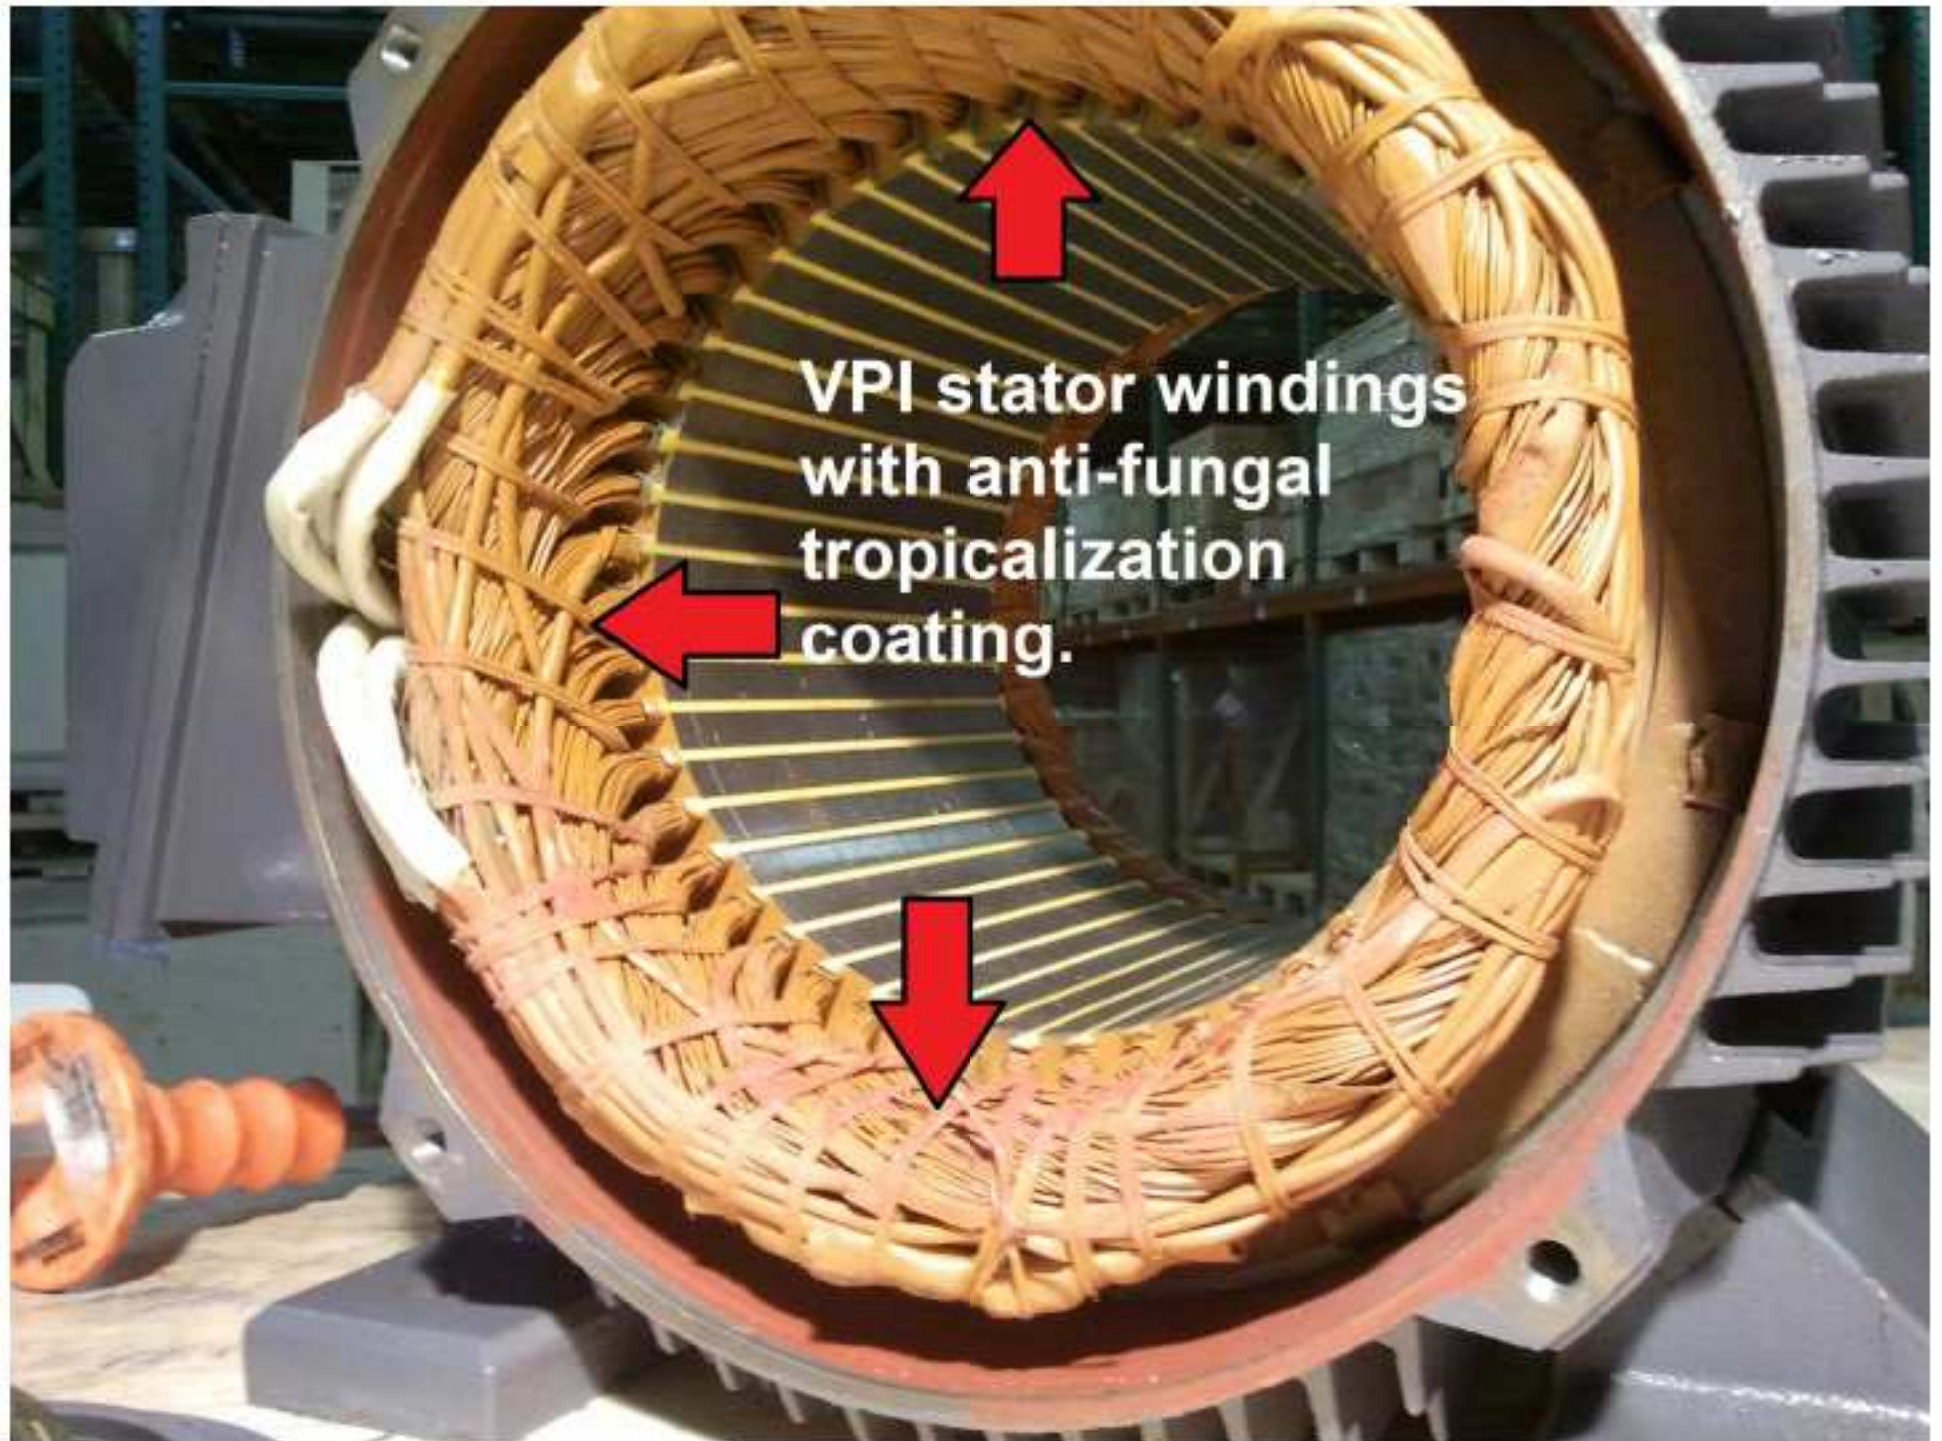

VPI stator windings
with anti-fungal
tropicalization
coating.


Class H DMD or NMN slot liners and top sticks




Class H sleeving and tie cord



Phase insulated class H stator

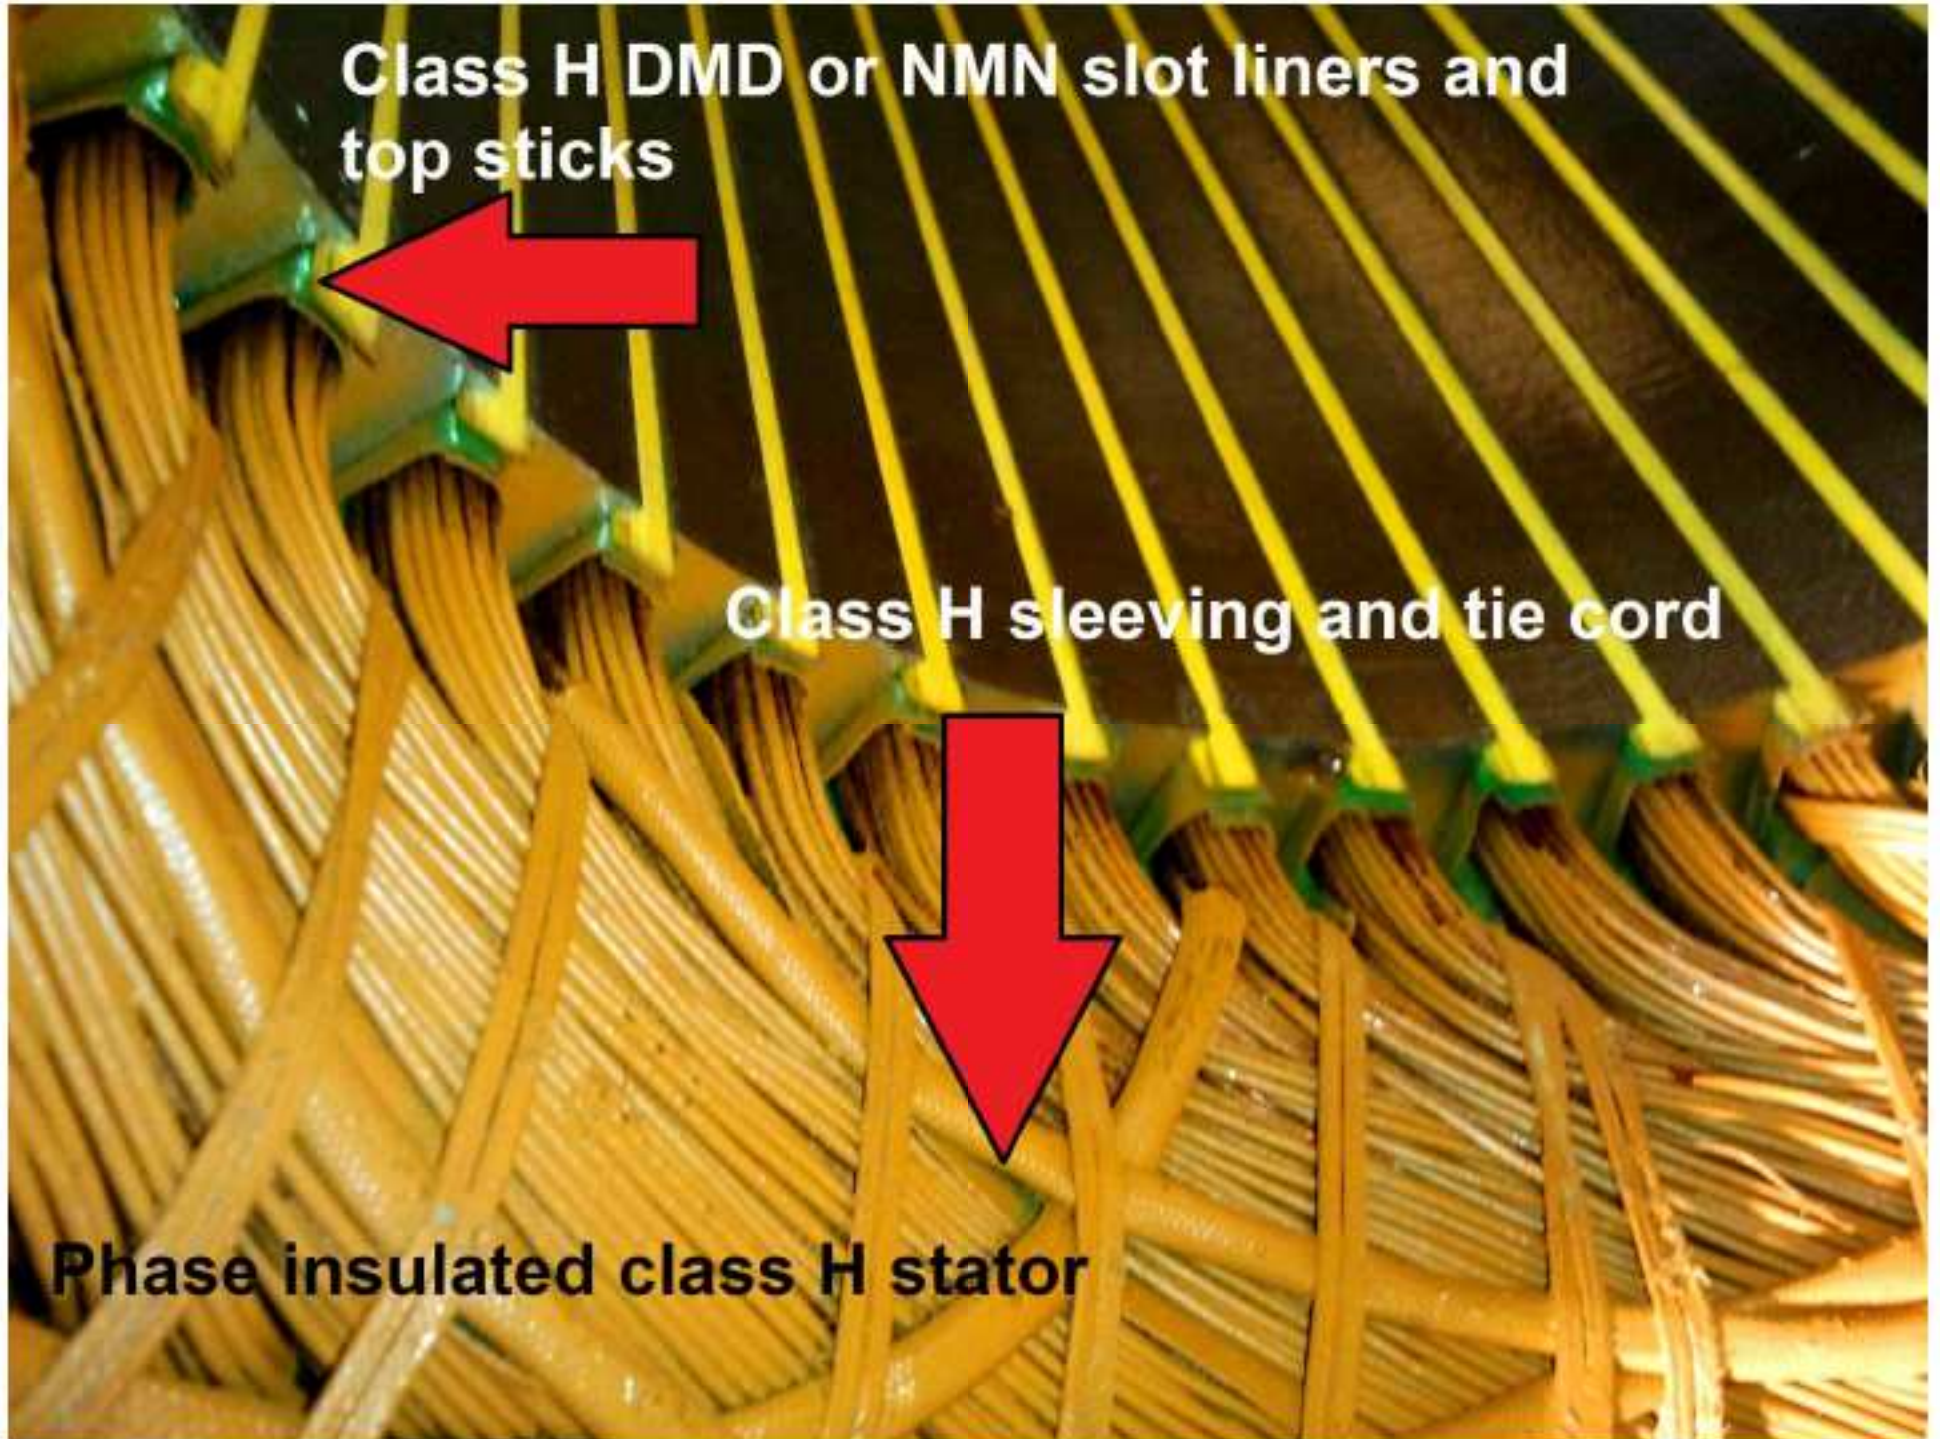

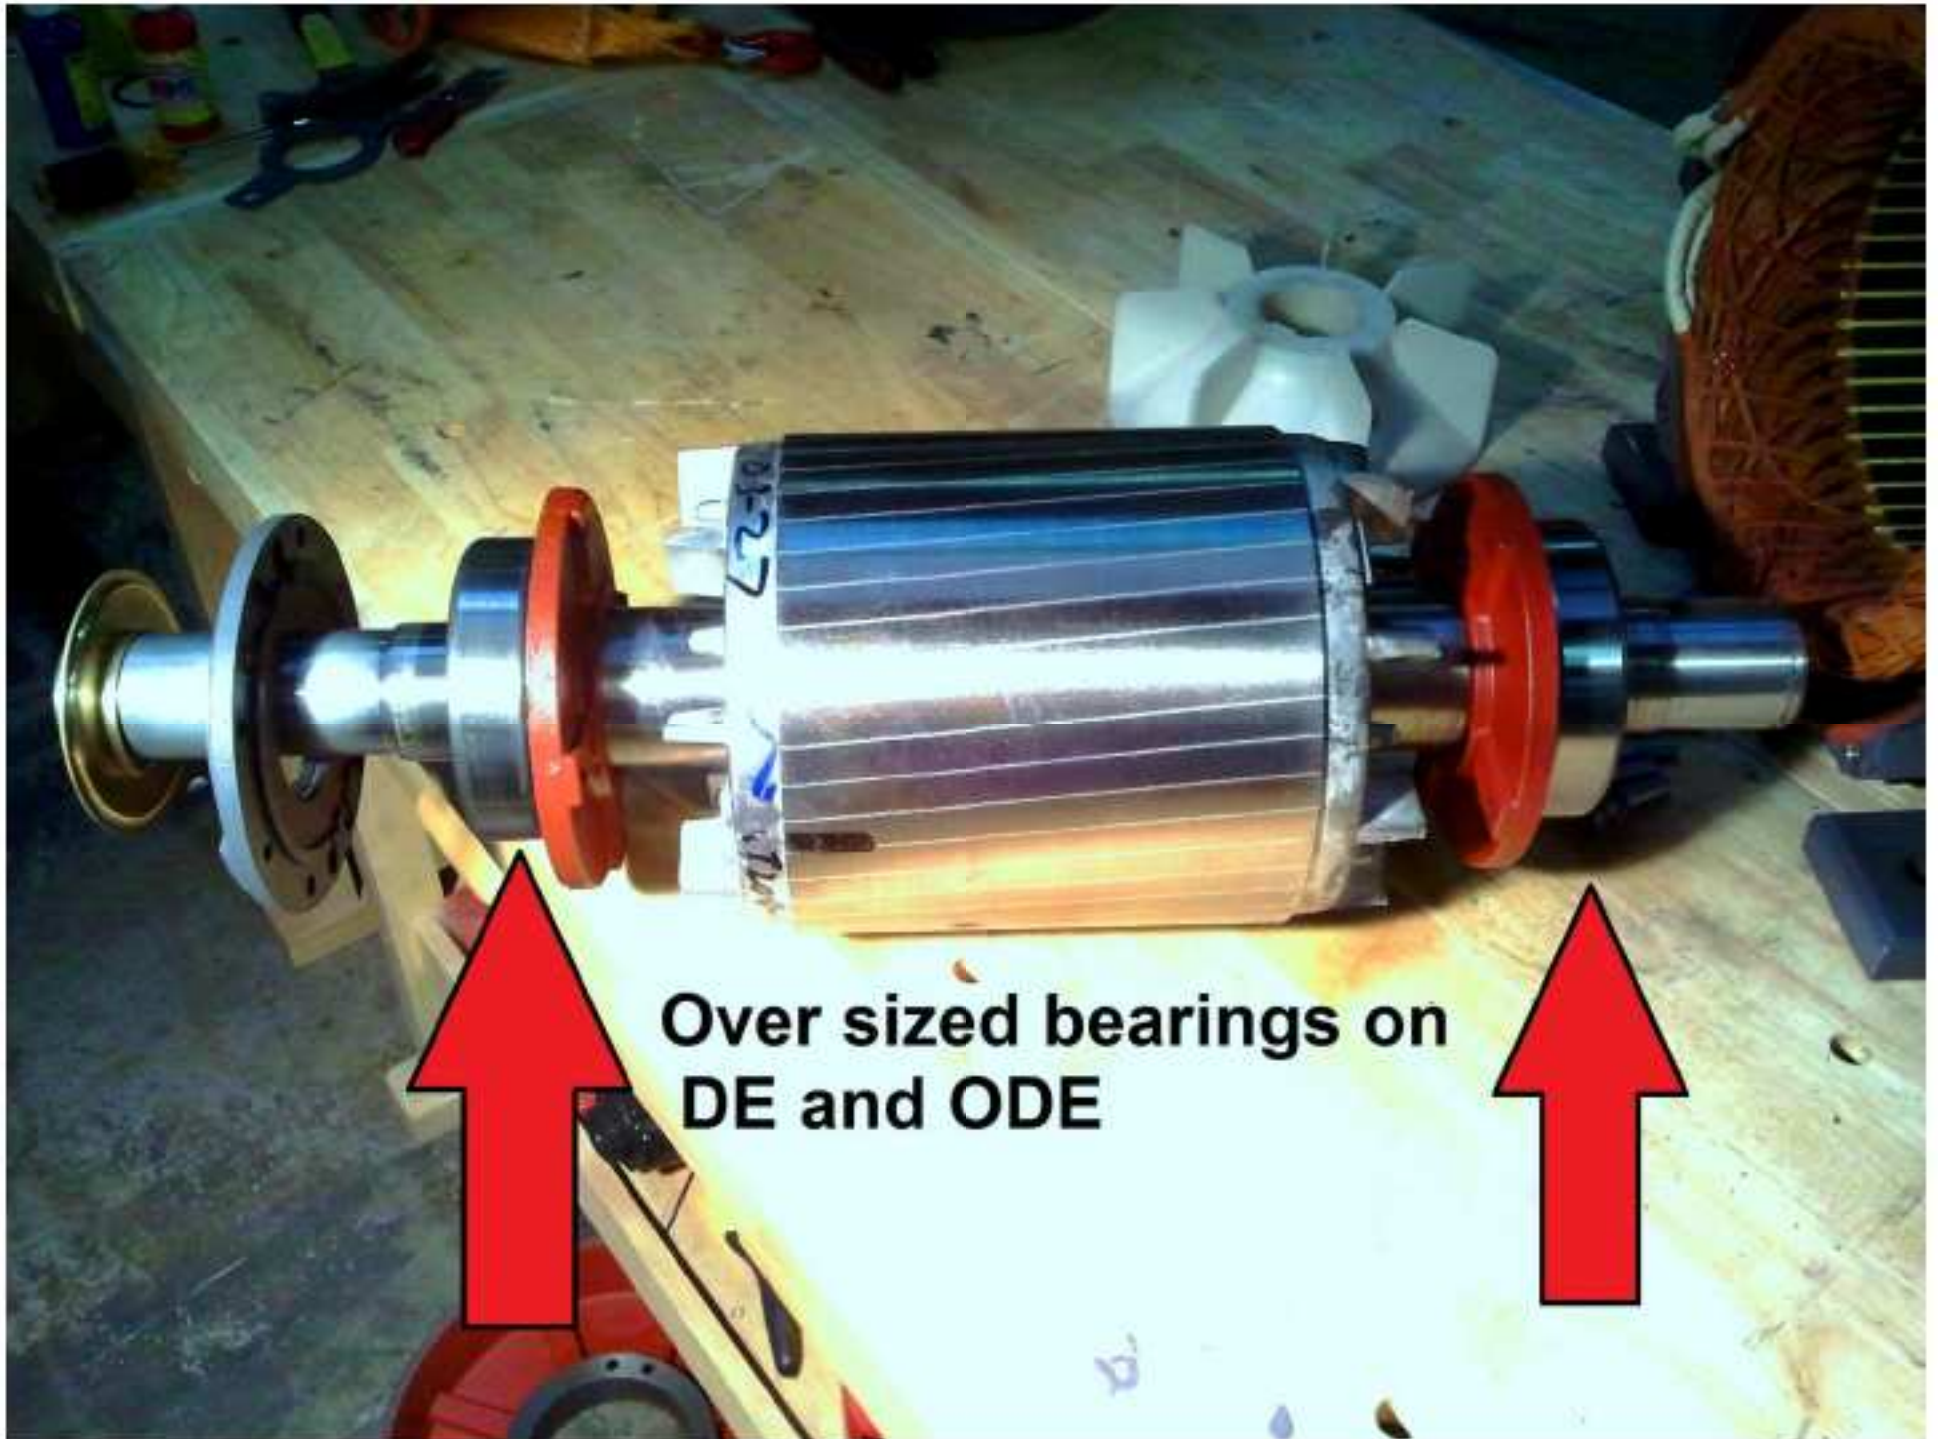


**Over sized bearings on
DE and ODE**



ODE grease access plug with label indicating the type of grease used.



One way sintered brass condensation and moisture drain plugs on DE and ODE.

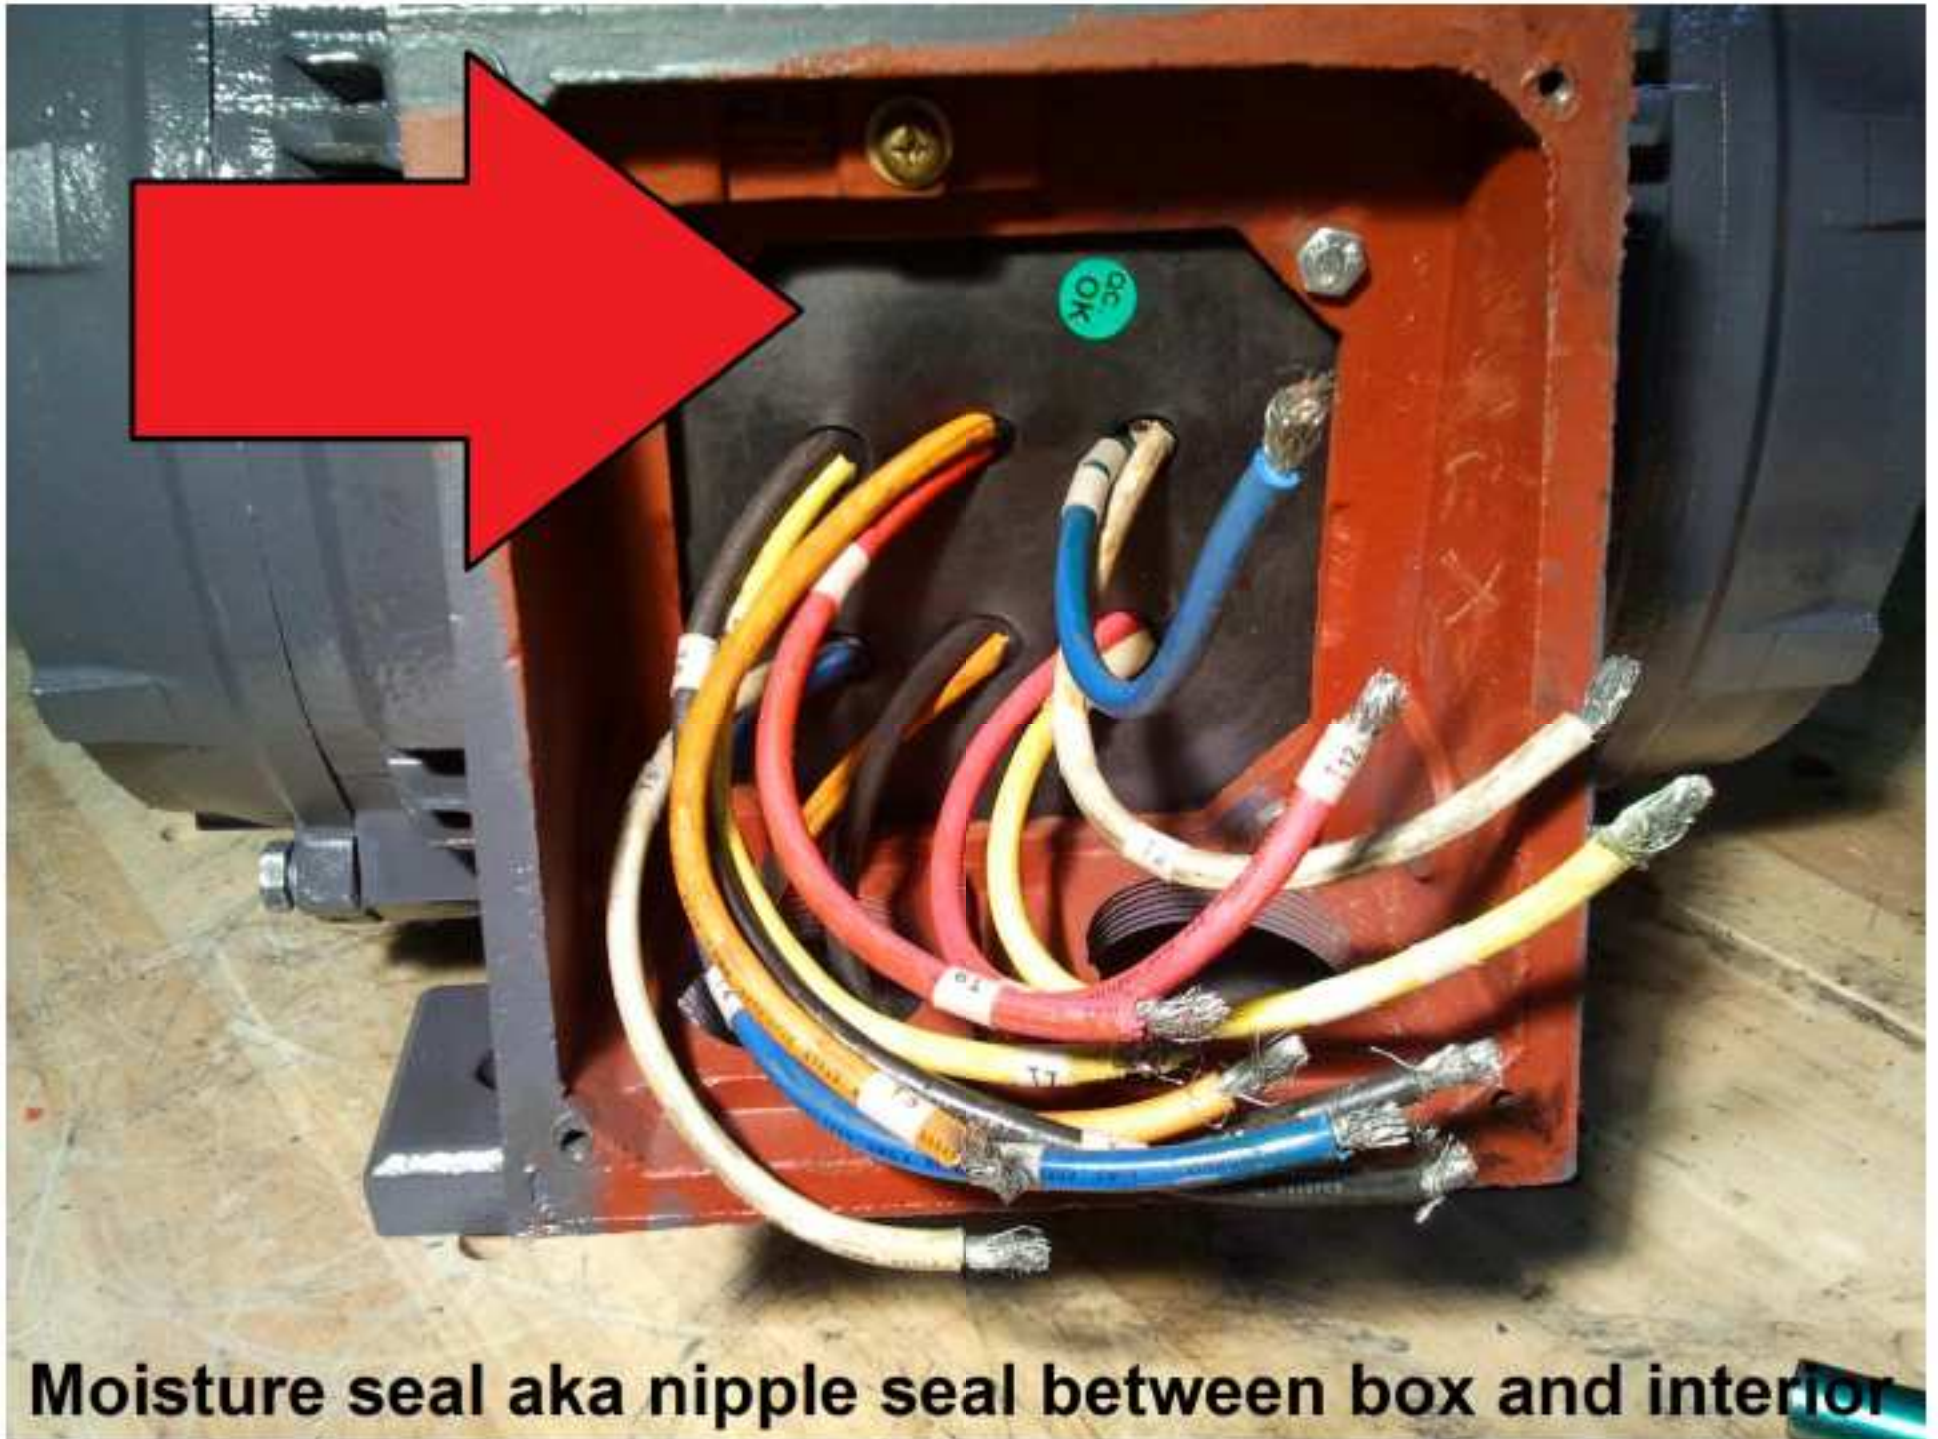

Moisture seal aka nipple seal between box and interior

This presentation focused on the basic features and benefits of our current and standard product offerings. Techtop is a very strong and growing company and we plan to add new products to our catalog continuously. If you have any questions or need more technical or other information please feel free to pay us a visit or contact us anytime.



VPI stator, Class H Stator, Phase Insulated, Polyurea grease, 36 month warranty, 40 degree ambient rating, UL 1004 recognized, 208-230/460V. 60HZ 1.25 SF, 50HZ 1.0 SF, Wye-Delta start wound, removable feet, corrosion resistant hardware, split conduit box is 90 degree rotatable, oversized bearings on both ends, F1 to F2 convertible, tropicalized stator windings, v seal slinger, moisture seal aka nipple seal between box and body, cast iron fan covers available, class 1, Div 2, groups C and D compliant, re-greasable bearings 250 frame and higher, one way sintered brass drain plugs, 1045 shaft through 286T and 4140 shaft 326T and higher. EISA compliant inverter rated 15:1 constant torque. MG1 part 31 compliant for VFD use.

Visit us on the web: www.techtop.com

Visit our main office: 1268 Old Alpharetta Rd.

Alpharetta, GA 30005

Contact us: 678-436-5540 or 877-772-6683 or

info@techtopind.com

Our current main warehouse locations are:

Alpharetta Georgia, Columbus Indiana, Garland Texas, Chicago Illinois, Sioux Falls South Dakota,

Wallingford Connecticut, Phoenix Arizona,

Lenexa Kansas, Cerritos California and a few

more.