



NEMA Premium

**NEMA**

<b>MOTOR MODEL:</b>	BR3-CI-TF-284TC-6-BR-E-15
<b>FACTORY TYPE:</b>	TXC

Premium NEMA Cast Iron, TEFC

<b>ELECTRICAL DATA</b>		
	60 Hz	50 Hz
Horsepower	15.0	15.0
Speed, RPM	1175	965
Voltage	460	380
# Phase	3	
Full Load Amps	19.3	-
Power Factor	0.8	-
Nominal Efficiency	91.7	89.1
3/4 Load Efficiency	-	-
Service Factor	1.25	1.0
KVA Code	M	F
FL Amps. @ 208 V	-	-
LRC @ 60Hz HV	203.894	-
Start Capacitor	-	
Start Capacitor V	-	
Run Capacitor	-	
Run Capacitor V	-	
Number of Leads	12	
Connection	DD/D	
Coil Resistance	-	
Date Code	-	
<b>Load</b>	<b>Efficiency %</b>	<b>P.F.</b>
50%	89.62	0.58
75%	91.24	0.71
100%	91.52	0.78
<b>FULL LOAD TEMPERATURE RISE</b>		
FL Temp Rise °C	46.0	-
<b>3D Image Link</b>		
<a href="#">BR3-CI-TF-284TC-6-BR-E-15</a>		

<b>GENERAL DATA</b>		
Frame Size	284TC	
Frame Enclosure	TEFC	
Mounting	Rigid/C-Flange	
Insulation Class	F	
Duty	Cont. / S1	
NEMA Design	A	
Frame Material	Cast Iron	
Ingress Protection	56	
Tropicalization	true	
Cable Entry	1-NPT 1-1/2"	
Feet Removable	true	
Double Drilled	-	
Paint Color	Graphite Gray	
Paint RAL	7024	
Weight lb	363.825	
<b>MECHANICAL DATA</b>		
DE Bearing	6311C3	
NDE Bearing	6311C3	
dB No-Load	-	
Rotor Wk <sup>2</sup> , Lb-Ft <sup>2</sup>	-	
Comp Ring (wavey washer)	-	
<b>TORQUE VALUES</b>	<b>Torque lb-ft</b>	<b>% FLT</b>
Locked Rotor Torque	220.176	326.0
Pull-Up Torque	96.5801	143.0
Breakdown Torque	268.128	397.0
Full Load Torque	67.5386	100.0
<b>SITE CONDITIONS</b>		
Ambient Temp °C	40	
Altitude Above Sea Level m	1000	

\*This report valid for above Date Code and newer models, please contact Techtop for more info.

Techtop Industries  
 2815 Colonnades Court  
 Peachtree Corners, GA 30071  
 Tel: 678-436-5540  
 E-Mail: info@techttopind.com




NEMA Premium

**NEMA**

<b>MOTOR MODEL:</b>	BR3-CI-TF-284TC-6-BR-E-15
<b>FACTORY TYPE:</b>	TXC

Premium NEMA Cast Iron, TEFC

Torque Speed (T-n) Curve

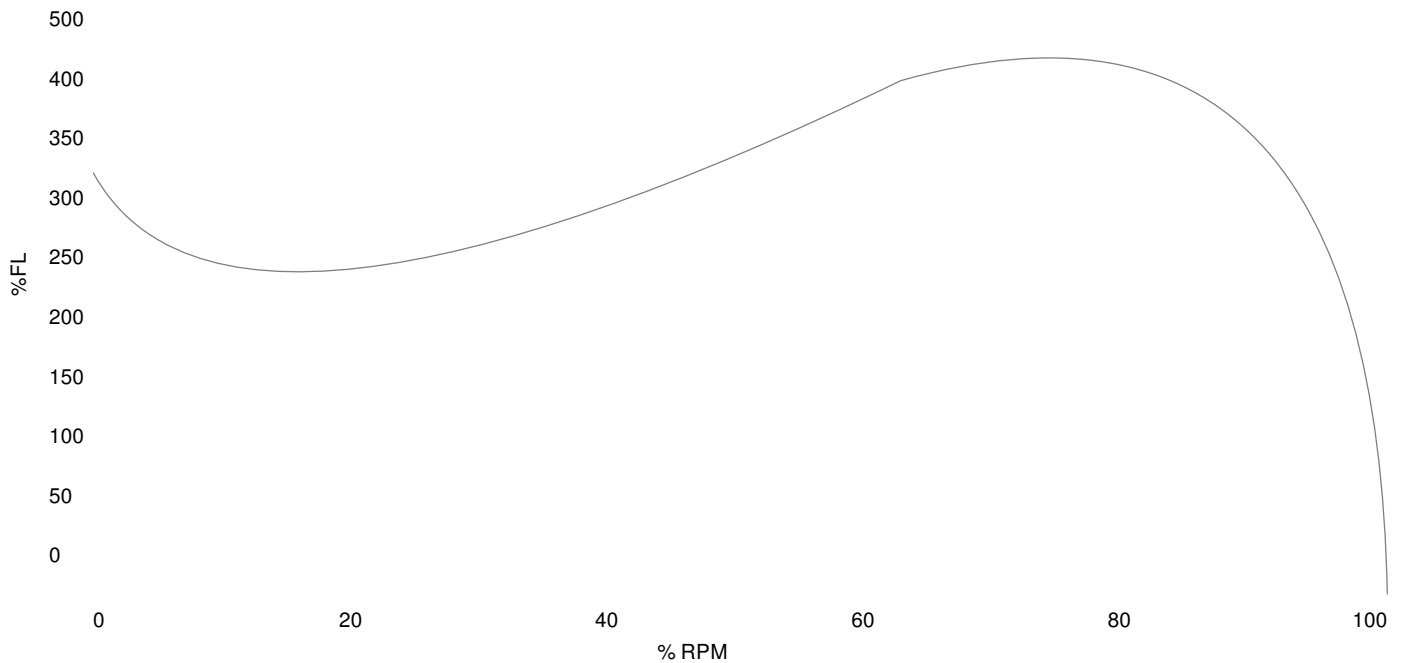

Performance Load Values, High Voltage, 60Hz

Torque Values	Torque lb-ft	% FLT	Performance Values	
Locked Rotor Torque	220.176	326.0	Start Configuration	-
Pull-Up Torque	96.5801	143.0	Starting Current (A)	-
Breakdown Torque	268.128	397.0	No-Load Current (A)	-
Full Load	67.5386	100.0	No-Load Power Factor	-

% Load	Horsepower	Current, Amps	Input power, Kilowatts	Speed, RPM	Efficiency	PF
0	-	10.91	-	-	-	-
25	3.75	11.67	3.39	1196.6	83.41	0.36
50	7.5	13.71	6.3	1193.3	89.62	0.58
75	11.25	16.54	9.29	1189.8	91.24	0.71
100	15.0	19.97	12.35	1186.0	91.52	0.78
125	18.75	23.86	15.49	1182.0	91.21	0.81

Techtop Industries  
 2815 Colonnades Court  
 Peachtree Corners, GA 30071  
 Tel: 678-436-5540  
 E-Mail: info@techttopind.com