



# Phase Converter Motor

## NEMA

<b>MOTOR MODEL:</b>	PC3-CI-TF-364T-4-BR-B-60
<b>FACTORY TYPE:</b>	TFC

### NEMA Cast Iron, TEFC

ELECTRICAL DATA		
	60 Hz	50 Hz
Horsepower	60.0	-
Speed, RPM	1775	-
Voltage	230	-
# Phase	3	
Full Load Amps	135.94	-
Power Factor	0.86	-
Nominal Efficiency	95.0	-
Service Factor	1.15	-
KVA Code	L	-
FL Amps. @ 208 V	-	-
LRC @ 60Hz HV	664.692	-
Start Capacitor	-	
Start Capacitor V	-	
Run Capacitor	-	
Run Capacitor V	-	
Number of Leads	3	
Connection	DD/D	
Coil Resistance	-	
Date Code	-	
Load	Efficiency %	P.F.
50%	94.31	0.77
75%	94.89	0.85
100%	94.77	0.88
FULL LOAD TEMPERATURE RISE		
FL Temp Rise °C	55.0	-
3D Image Link		
Not available for this motor		

GENERAL DATA		
Frame Size	364T	
Frame Enclosure	TEFC	
Mounting	Rigid	
Insulation Class	F	
Duty	Cont. / S1	
NEMA Design	A	
Frame Material	Cast Iron	
Ingress Protection	55	
Tropicalization	true	
Cable Entry	1-NPT 2"	
Feet Removable	-	
Double Drilled	-	
Paint Color	Graphite Gray	
Paint RAL	7024	
Weight lb	782.775	
MECHANICAL DATA		
DE Bearing	6313C3	
NDE Bearing	6313C3	
dB No-Load	-	
Rotor Wk <sup>2</sup> , Lb-Ft <sup>2</sup>	-	
Comp Ring (wavey washer)	DE	
TORQUE VALUES	Torque lb-ft	% FLT
Locked Rotor Torque	542.343	306.0
Pull-Up Torque	368.651	208.0
Breakdown Torque	600.831	339.0
Full Load Torque	177.236	100.0
SITE CONDITIONS		
Ambient Temp °C	40	
Altitude Above Sea Level m	1000	

\*This report valid for above Date Code and newer models, please contact Techtop for more info.




# Phase Converter Motor

<b>MOTOR MODEL:</b>	PC3-CI-TF-364T-4-BR-B-60
<b>FACTORY TYPE:</b>	TFC

## NEMA

### NEMA Cast Iron, TEFC

Torque Speed (T-n) Curve

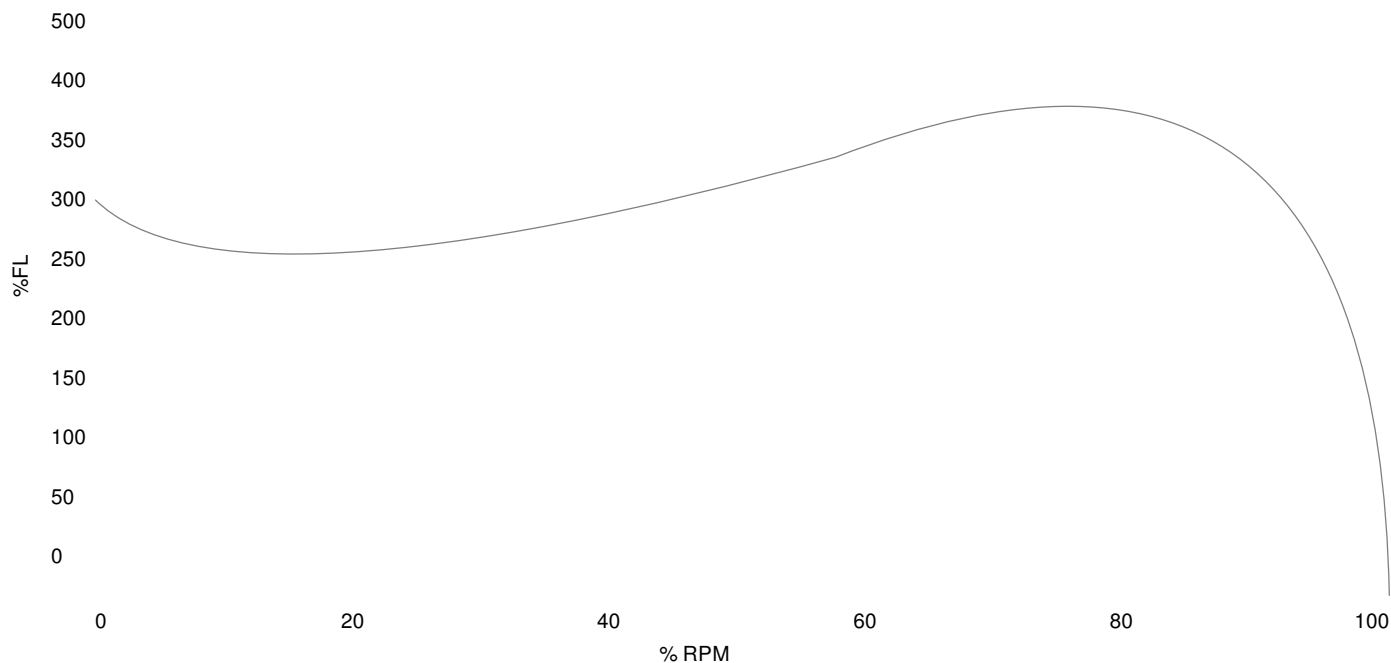

Performance Load Values, High Voltage, 60Hz

Torque Values	Torque lb-ft	% FLT	Performance Values
Locked Rotor Torque	542.343	306.0	Start Configuration
Pull-Up Torque	368.651	208.0	Starting Current (A)
Breakdown Torque	600.831	339.0	No-Load Current (A)
Full Load	177.236	100.0	No-Load Power Factor

% Load	Horsepower	Current, Amps	Input power, Kilowatts	Speed, RPM	Efficiency	PF
0	-	22.39	-	-	-	-
25	15.0	27.61	12.34	1796.1	91.2	0.56
50	30.0	38.98	23.86	1792.3	94.31	0.77
75	45.0	52.43	35.57	1788.2	94.89	0.85
100	60.0	67.55	47.48	1783.9	94.77	0.88
125	75.0	83.89	59.63	1779.4	94.34	0.89


Techtop Industries  
 2815 Colonnades Court  
 Peachtree Corners, GA 30071  
 Tel: 678-436-5540  
 E-Mail: info@techttopind.com

## NEMA


<b>MOTOR MODEL:</b>	PC3-CI-TF-364T-4-BR-B-60
<b>FACTORY TYPE:</b>	TFC

### NEMA Cast Iron, TEFC

#### 3 Phase NEMA Single Voltage 575V or 460V

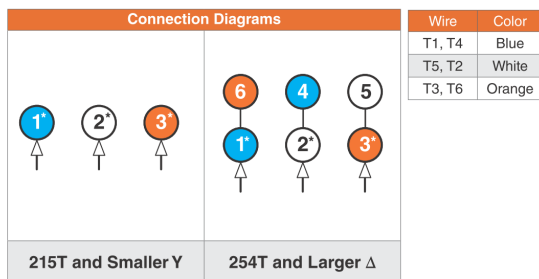

When motor is in F1 position, leads shown with "\*" exit the casing above the center line of the motor, the remaining leads exit below the center line. This information can be used to identify missing or mislabelled leads.

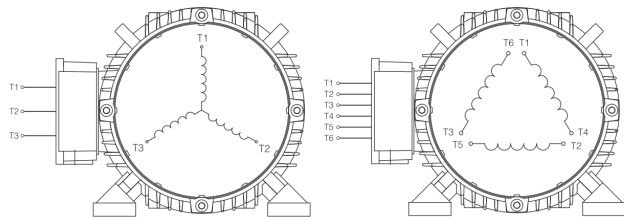

<b>MOTOR MODEL:</b>	PC3-CI-TF-364T-4-BR-B-60
<b>FACTORY TYPE:</b>	TFC

**NEMA**

NEMA Cast Iron, TEFC

